


SPECIFICATION
 100% Open Short & Miswire Test.
 RoHS Compliant

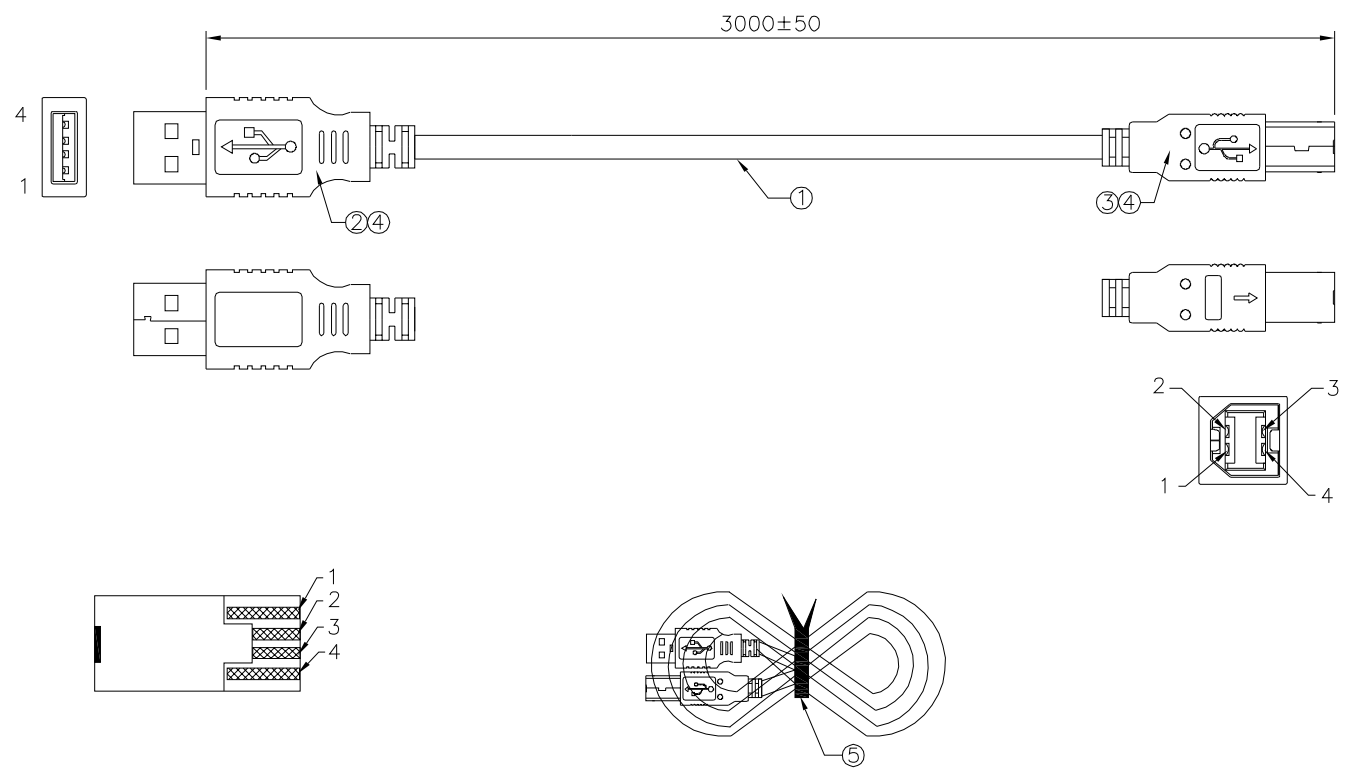

Pin Assignment			
USB A/M		USB B/M	
1	Red(Vbus)	1	
2	White(D-)	2	
3	Green(D+)	3	
4	Black(Gnd)	4	
	Drain		Shell
	Braid		

No.	Name	Q'ty	Description
①	Cable	1 PCS	UL2725 #24*1P+#22*2C+AL+48/0.10BS White OD=4.5mm
②	USB Plug A	1 PCS	USB A Type Male Solder Wire White Insulator Selective Gold Plated 30u"
③	USB Plug B	1 PCS	USB B Type Male Solder Wire White Insulator Selective Gold Plated 30u"
④	Mold	10g	45P White PVC
⑤	Cable Ties	1 PCS	White PVC L=85mm

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
22112		MEI							
		HZF							
		DRAWING BY							
		CYP							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	05/25/2021
						NO.REV.	REVISIONS	CHK	DATE