

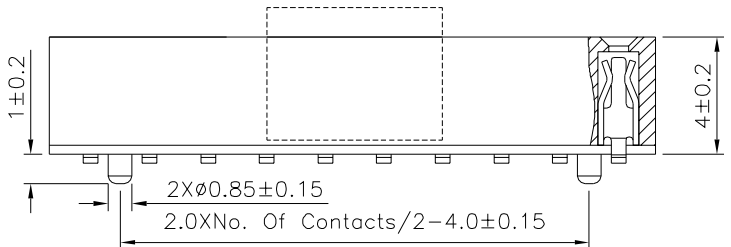


Recommend P.C.B Board Layout
PCB Tolerance:±0.05(Top View)

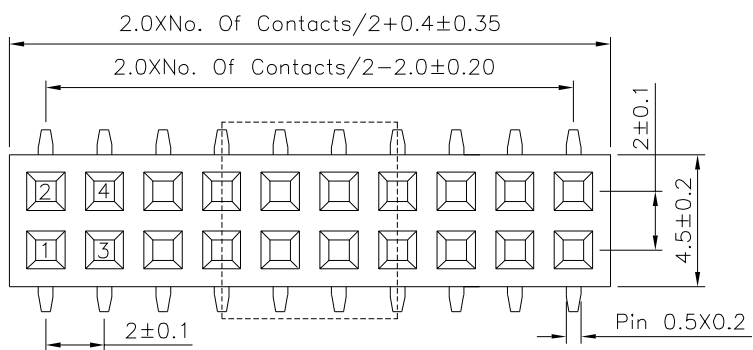

SPECIFICATION

Current Rating:1.5A
Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±2° .X ±0.25 .X* ±1.5° .XX ±0.20 .XX* ±1.0° .XXX ±0.15 .XXX* ±0.5°				
22815		MEI						
		CHECKED BY						
		HZF						
		DRAWING BY						
		LSM						
SCALE	NONE	REV.	A0	UNIT	mm			

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	06/27/2024
		REVISIONS		