

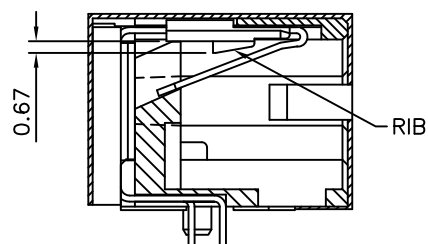
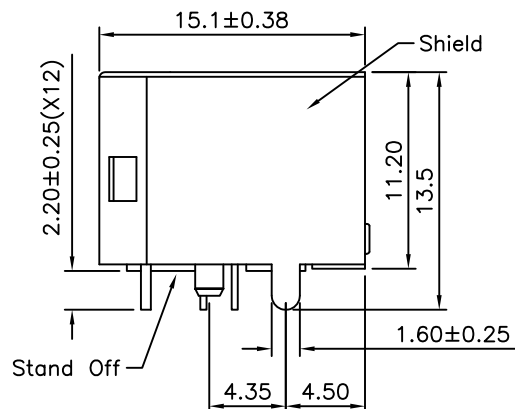
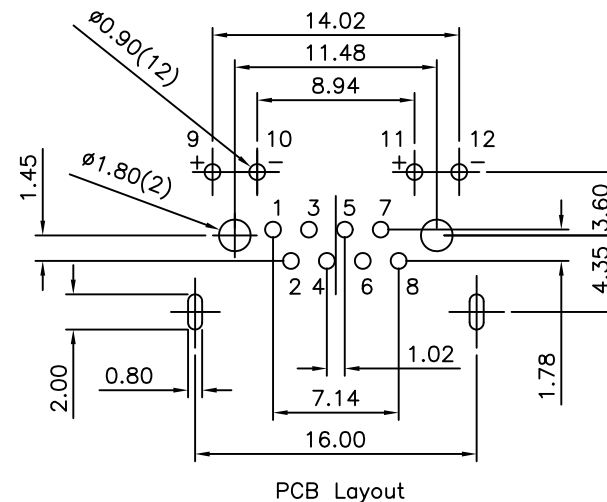


SPECIFICATIONS

Housing:DSM Stanyl TE250F6 (Nylon-46)
Heat Deflection Temp.290°C
Black Color,UL94V-0
Contacts:0.35mm Thick Phos-Bronze
Gold Plated 50u" On Contact Area
Tin Plated In Solder Area.
Shield:0.25mm Thick Copper Alloy,
Plated With Nickel

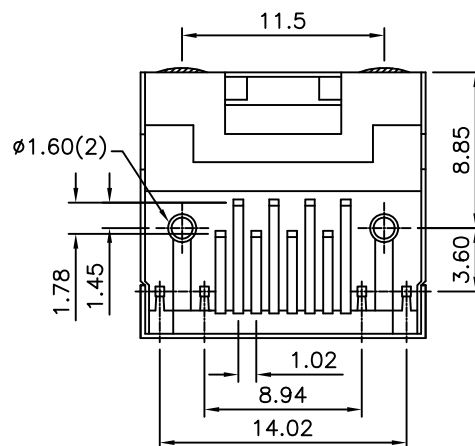

Sec A-A

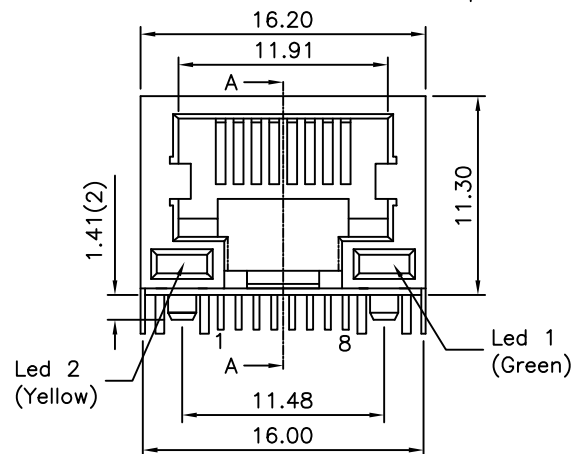

PCB Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00113

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG ±0°30'

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

01/06/2007