

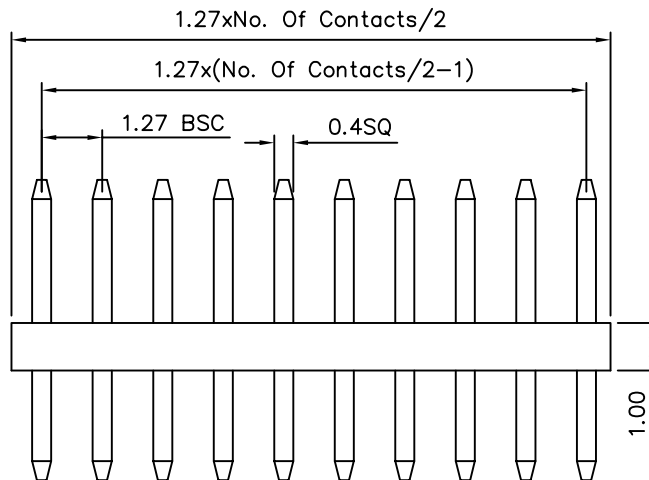


Recommended PCB Layout

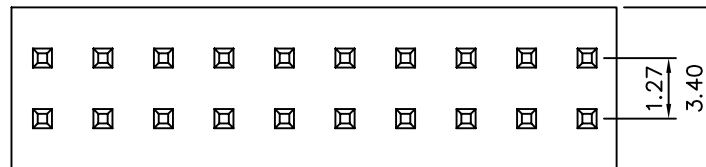

### SPECIFICATIONS

Current Rating: 1A  
 Operating Temperature: -55°C To +105°C  
 Insulation Resistance: 5000 Megohms Min.  
 Contact Resistance: 30 Milliohms Max.  
 Withstanding Voltage: AC 600V RMS  
 Durability: 50 Cycles  
 Retention Force: 454g Min.  
 Housing: Thermoplastic UL 94V-0  
 Contact: Copper Alloy

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

00123

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

REV.

A1


UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT  
 mm



NO. REV.

REVISIONS

CHK

DATE

A1

Modify Data

BECKY

04/04/2006

A0

NEW RELEASE

BECKY

01/14/2005