

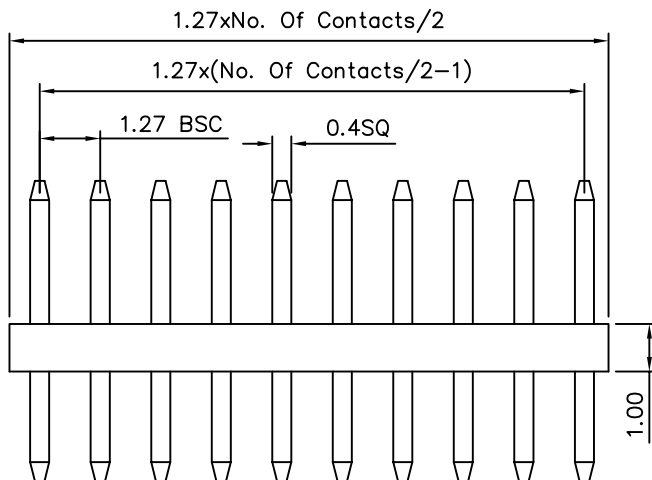


Recommended PCB Layout

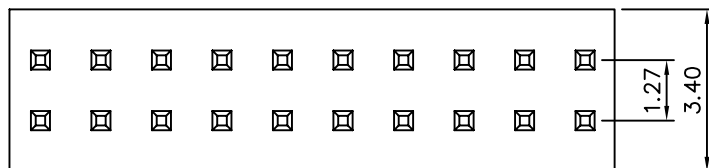

SPECIFICATIONS

Current Rating: 1A
 Operating Temperature: -55°C To +105°C
 Insulation Resistance: 5000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Withstanding Voltage: AC 600V RMS
 Durability: 50 Cycles
 Retention Force: 454g Min.
 Housing: Thermoplastic UL 94V-0
 Contact: Copper Alloy

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00124

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A1

Modify Data

BECKY

04/04/2006

A0

NEW RELEASE

BECKY

01/14/2005