


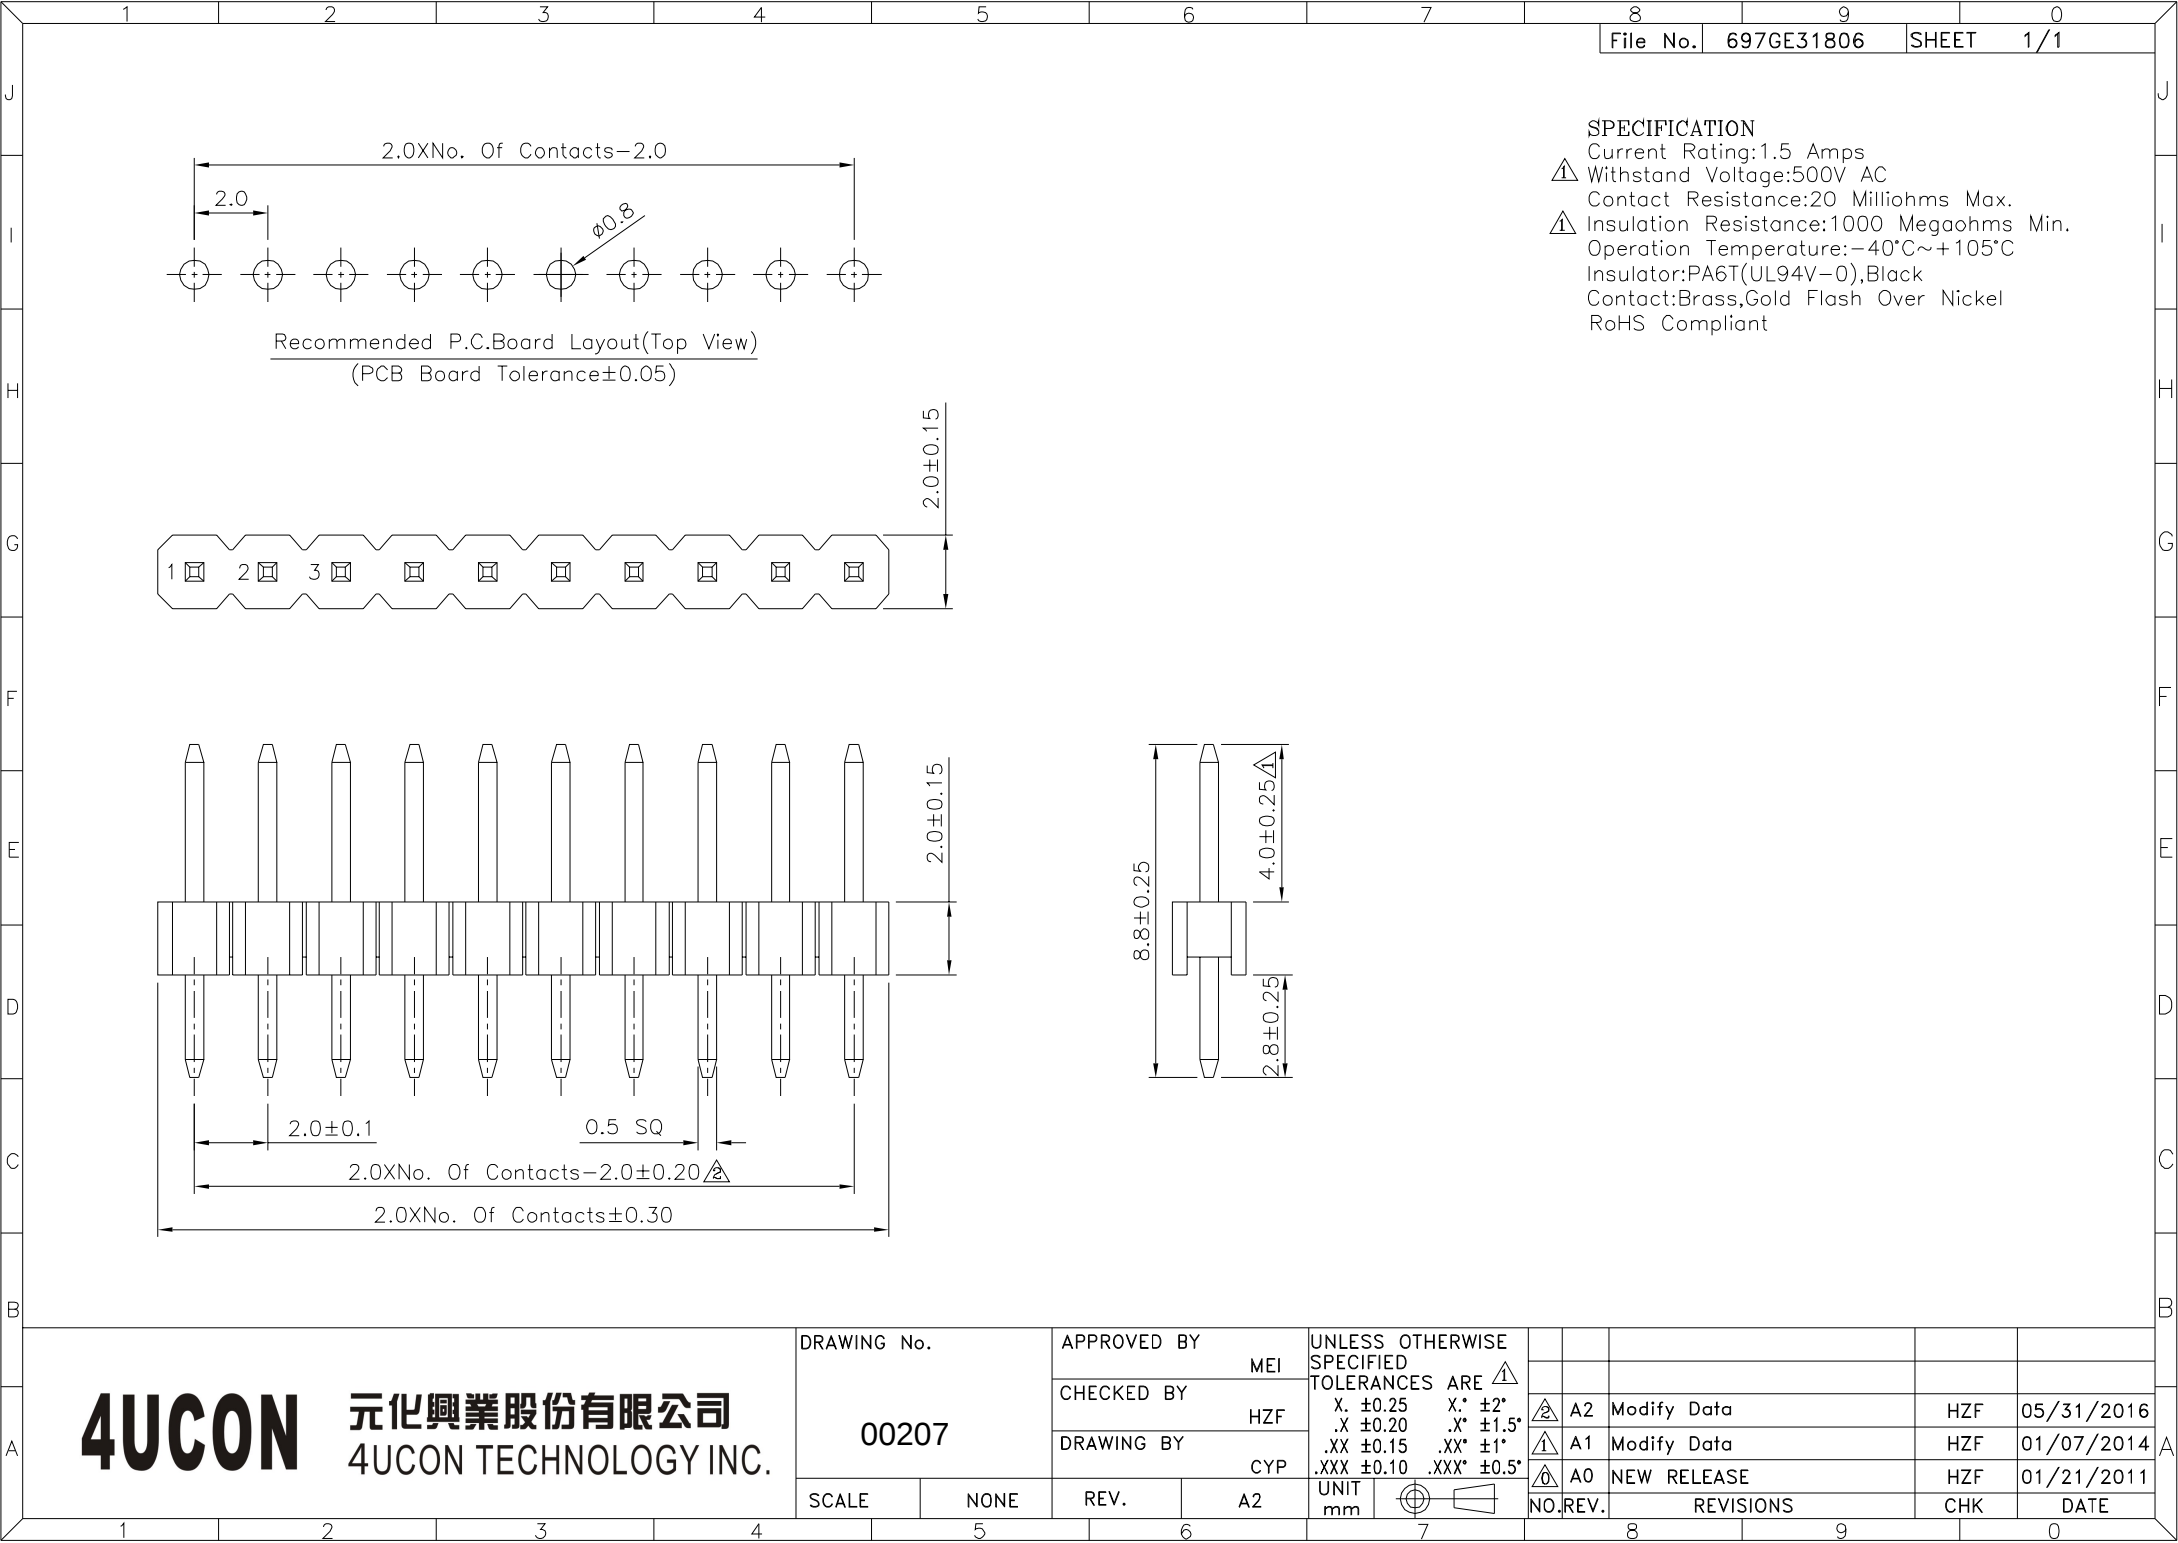

SPECIFICATION
Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE Δ							
		MEI									
		CHECKED BY									
		HZF									
00207		DRAWING BY		X. ± 0.25 X.* $\pm 2^\circ$.X ± 0.20 .X* $\pm 1.5^\circ$.XX ± 0.15 .XX* $\pm 1^\circ$.XXX ± 0.10 .XXX* $\pm 0.5^\circ$		Δ	A2	Modify Data		HZF	05/31/2016
		CYP				Δ	A1	Modify Data		HZF	01/07/2014
						Δ	A0	NEW RELEASE		HZF	01/21/2011
SCALE	NONE	REV.	A2	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE	
	5		6		7		8		9	0	