

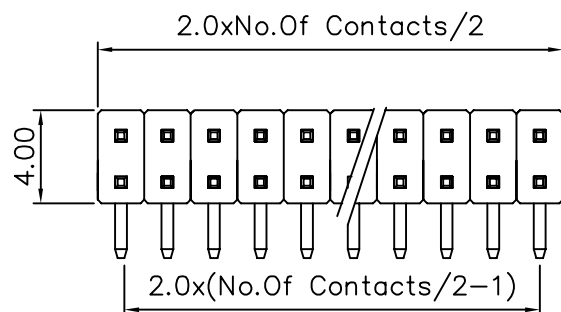


SPECIFICATIONS :

Current Rating: 1 A
 Contact Resistance : 20 Milliohms Max. At DC 100mA
 Insulator Resistance: 5000 Megohms Min. At DC 500V
 Operating Temperature: -55°C To +105°C
 Insulator: PBT UL94V-0
 Contact : Brass
 Gold Flash Over Nickel Or Tin

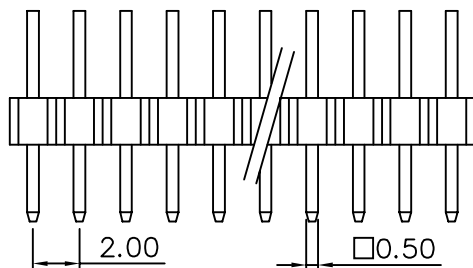

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00271

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE