

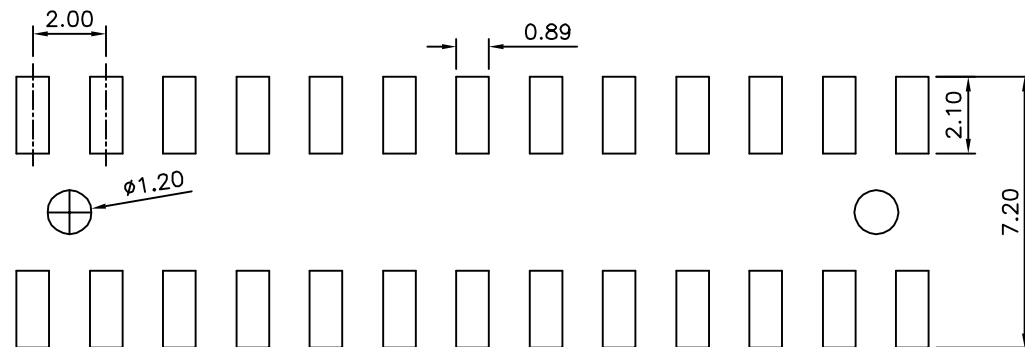



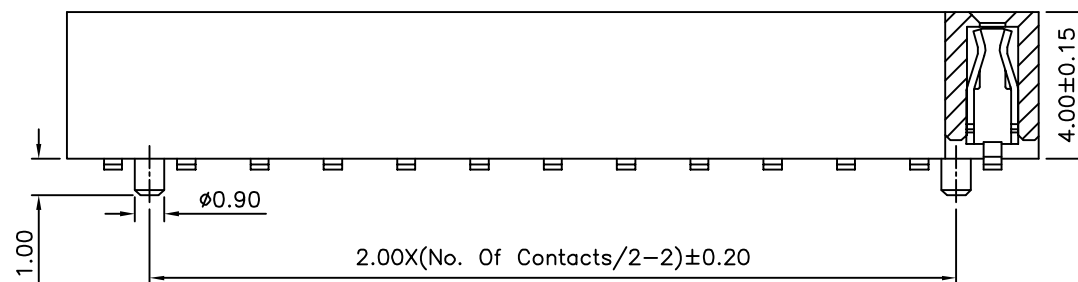

Recommended P.C.B. Layout

SPECIFICATION

Current Rating: 3 Amps/Contact Max.
 Withstand Voltage: 1000V AC/Minute
 Contact Resistance: 20 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operation Temperature: -55°C ~ +105°C
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 Insulator: PA6T+30%G.F.(UL94V-0), Black
 RoHS Compliant

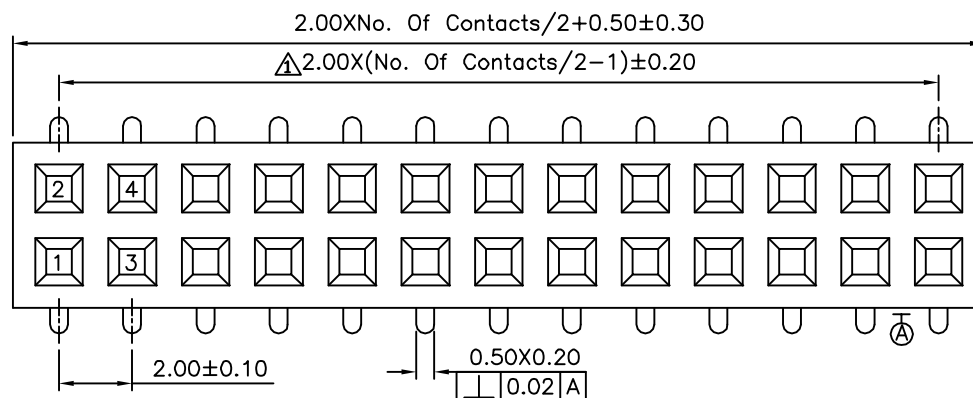

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00437

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△ X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/29/2015
△ A0		NEW RELEASE	HZF	08/17/2013