


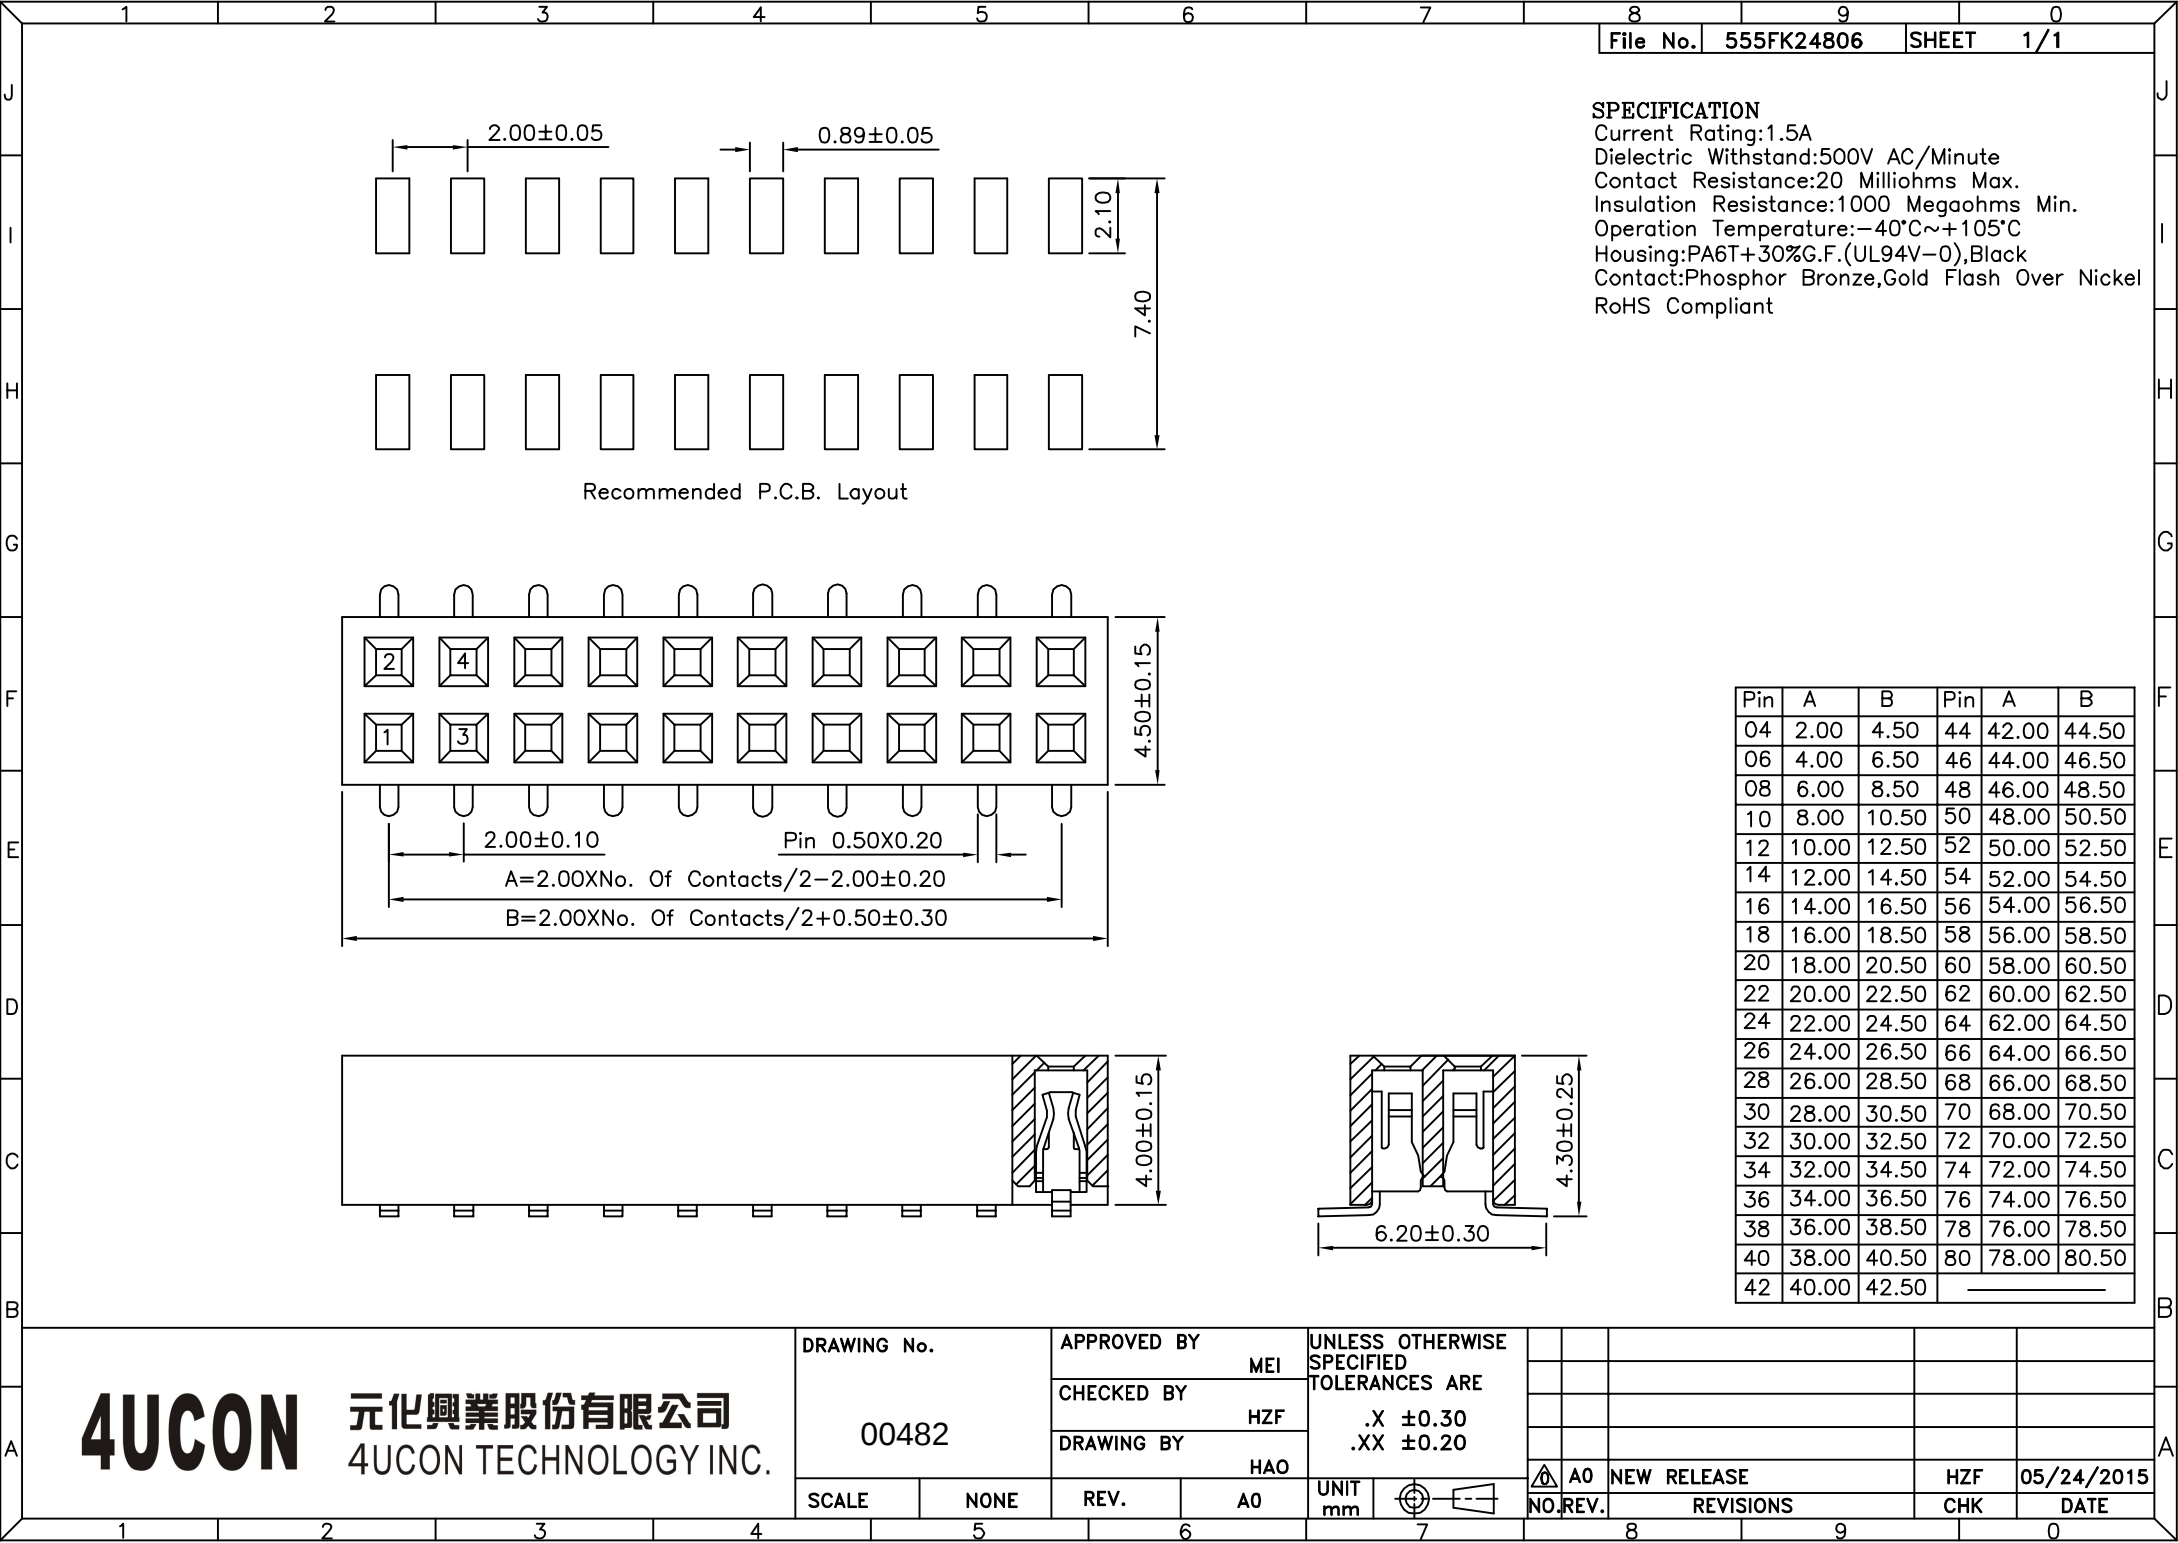

SPECIFICATION
Current Rating:1.5A
Dielectric Withstand:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 00482
APPROVED BY MEI
CHECKED BY HZF
DRAWING BY HAO
SCALE NONE REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
UNIT mm
NEW RELEASE HZF 05/24/2015
NO. REV. REVISIONS CHK DATE