File No.	697LK06806	SHEET	1/1

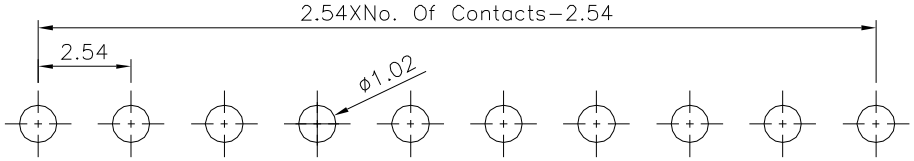

1 Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

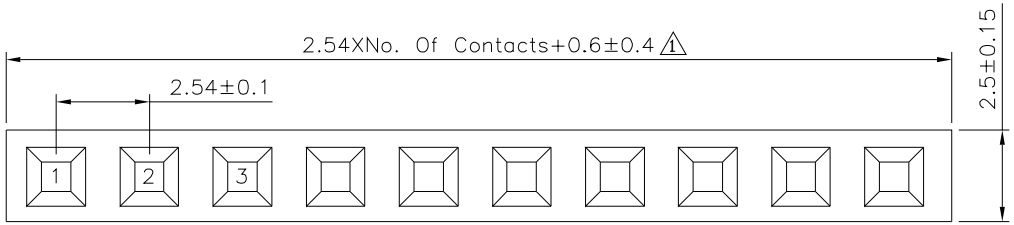

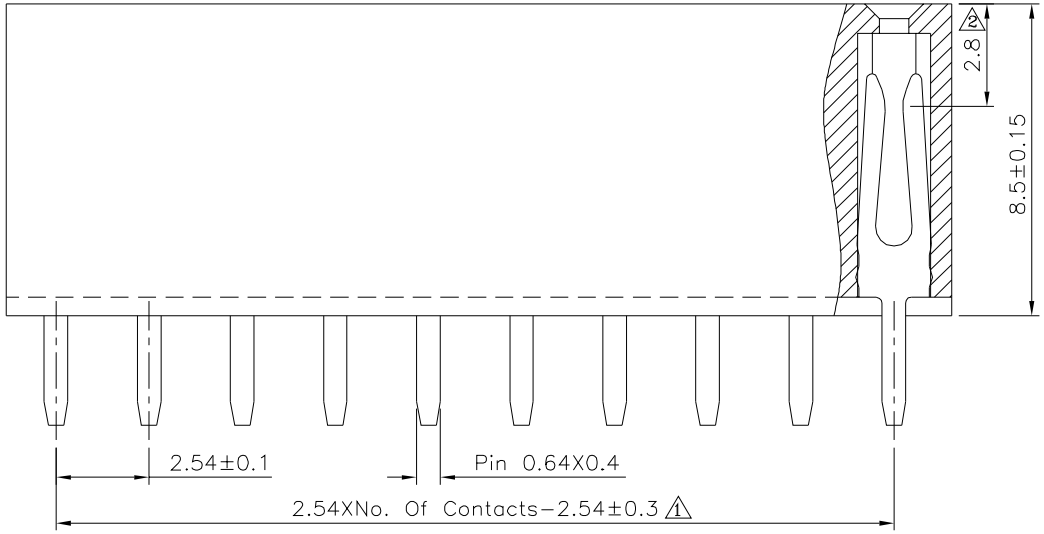

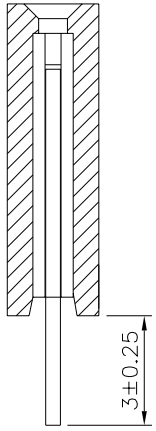

SPECIFICATION
Current Rating:3 Amps
2 1 Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	00552		
APPROVED BY	EMILY		
CHECKED BY	HZF		
DRAWING BY	SAN		
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.25	X.° ±2°	UNIT	mm
.X ±0.20	.X° ±1.5°		
.XX ±0.15	.XX° ±1°		
.XXX ±0.10	.XXX° ±0.5°		

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	11/06/2021
1	A1	Modify Data	HZF	05/28/2014
0	A0	NEW RELEASE	HZF	04/04/2013