
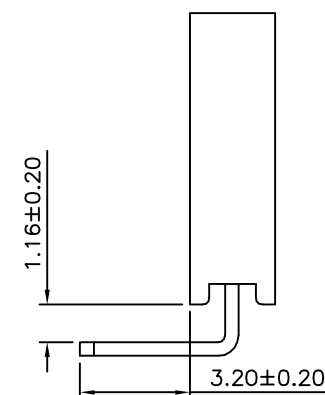
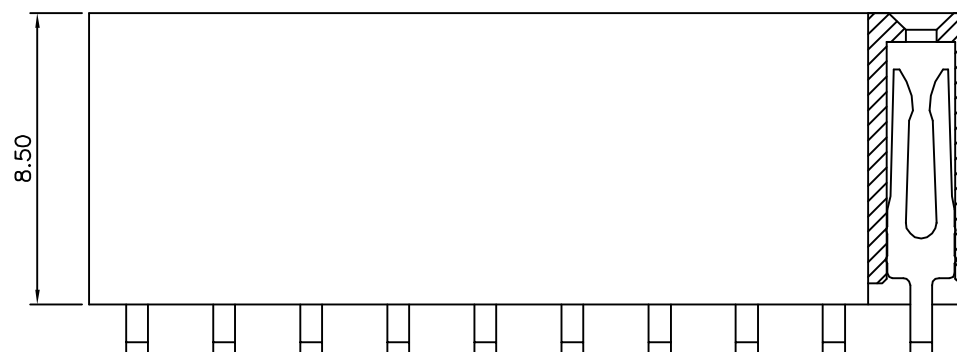


Recommended P.C.B. Layout

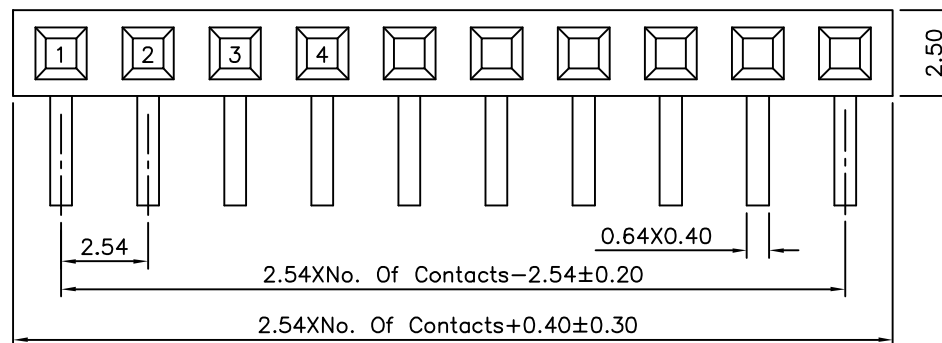

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms/Contact
Insulation Resistance:1000 Megaohms At 100V
Operating Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant