

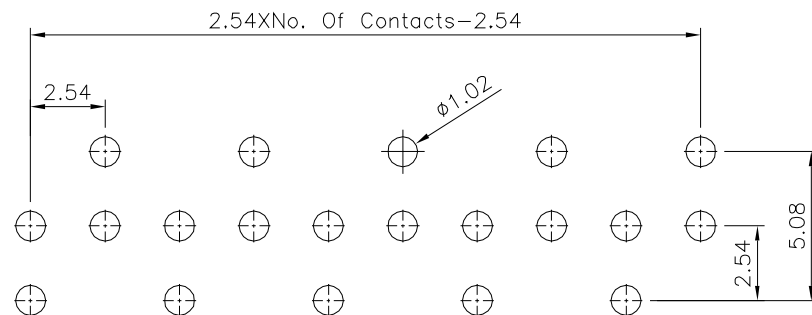



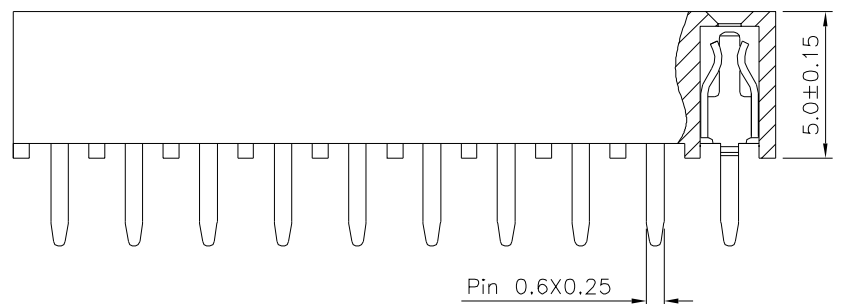

Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

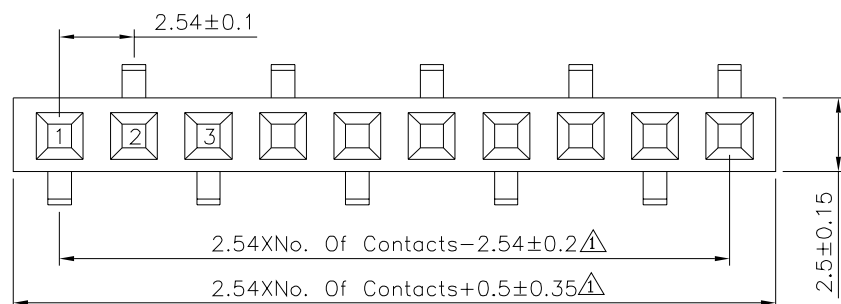

# SPECIFICATION

Current Rating:3A  
 $\Delta$ Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

00689

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

X.  $\pm 0.25$  X.\*  $\pm 2^{\circ}$   
 .X  $\pm 0.20$  .X\*  $\pm 1.5^{\circ}$   
 .XX  $\pm 0.15$  .XX\*  $\pm 1^{\circ}$   
 .XXX  $\pm 0.10$  .XXX\*  $\pm 0.5^{\circ}$

UNIT  
mm



|    |              |                |     |            |
|----|--------------|----------------|-----|------------|
|    |              |                |     |            |
|    |              |                |     |            |
|    |              |                |     |            |
| 5* |              |                |     |            |
|    | <div>⚠</div> | A1 Modify Data | HZF | 07/26/2021 |
| 5* |              |                |     |            |
|    | <div>⚠</div> | A0 NEW RELEASE | HZF | 11/19/2013 |
|    | NO.REV.      | REVISIONS      | CHK | DATE       |