

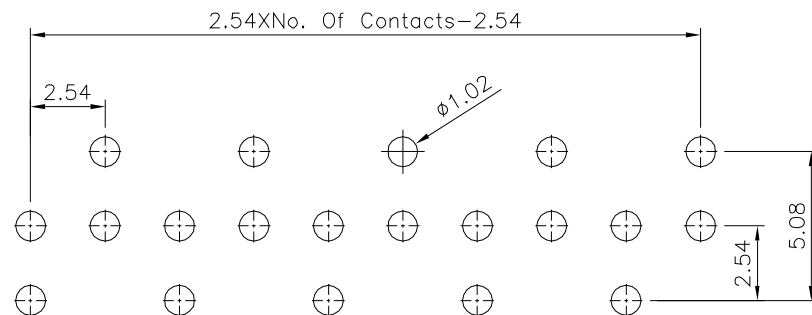



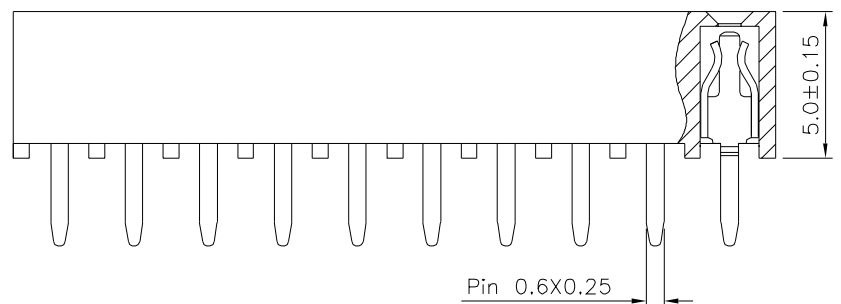

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

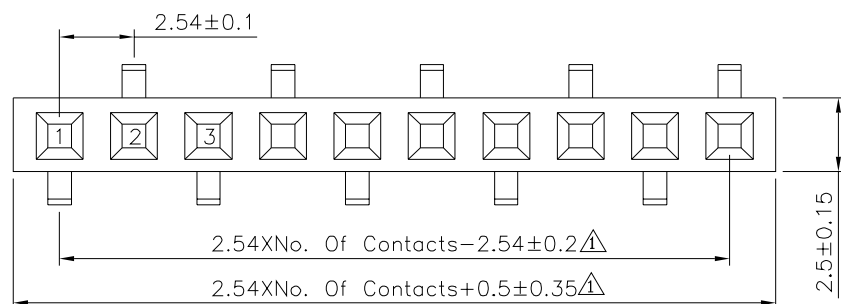

SPECIFICATION

Current Rating:3A
 Δ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00690

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
 .X ± 0.20 .X* $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
 mm



5*				
	①	A1	Modify Data	HZF
5*				07/26/2021
	②	A0	NEW RELEASE	HZF
				11/19/2013
	NO.REV.	REVISIONS		CHK
				DATE