

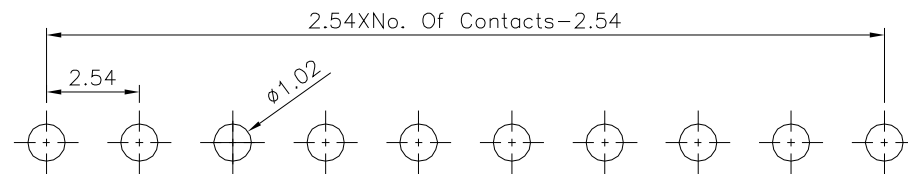



SPECIFICATION

- Current Rating:3A
- ⚠ Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Housing:PA6T,UL94V−0,Black
- ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

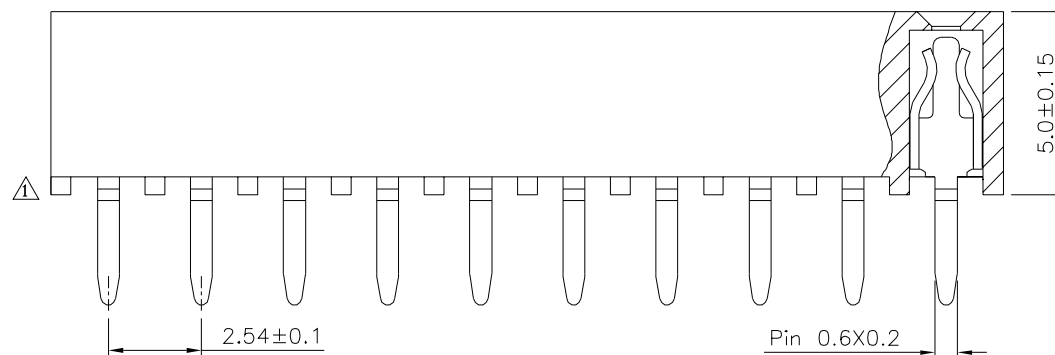

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

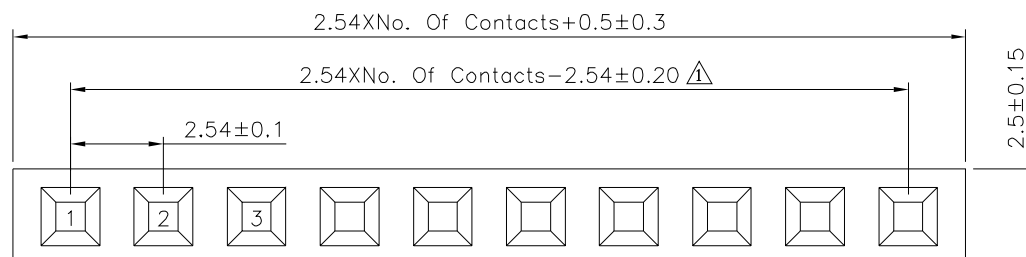

Pin 0.6X0.2

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00717

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

⚠ A1	Modify Data	HZF	08/13/2019
⚠ A0	NEW RELEASE	HZF	10/12/2013