

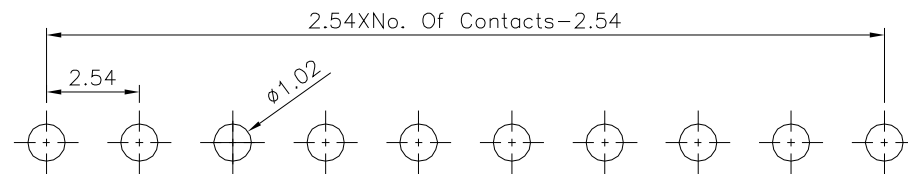



SPECIFICATION

- Current Rating:3A
- ⚠ Withstand Voltage:1000V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:−40°C~+105°C
- Housing:PA6T,UL94V−0,Black
- ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
- RoHS Compliant

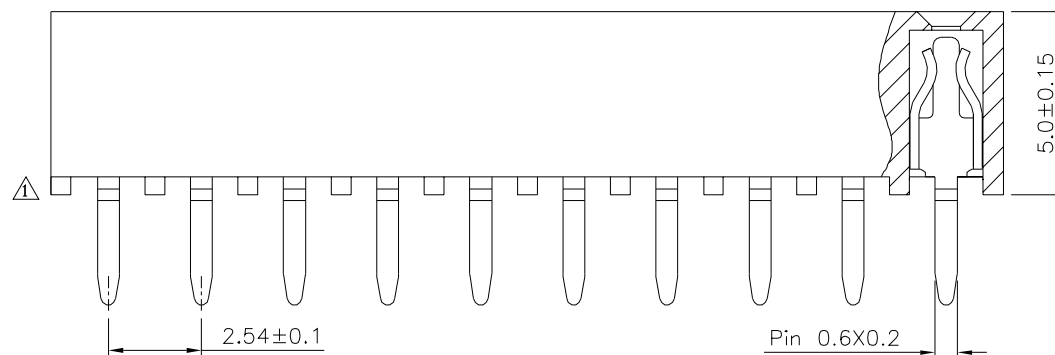

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

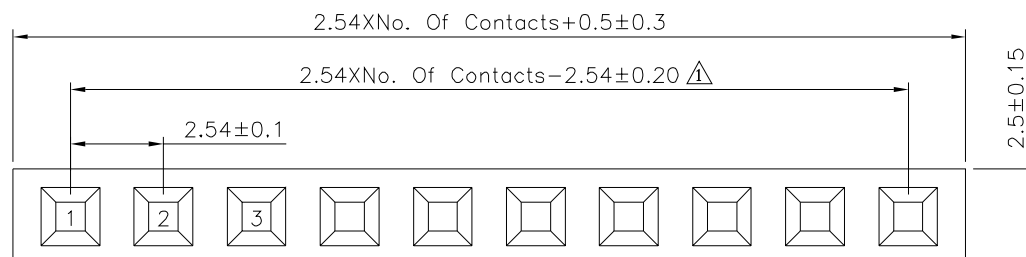

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00718

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25	X.* ±2°
.X ±0.20	.X* ±1.5°
.XX ±0.15	.XX* ±1°
.XXX ±0.10	.XXX* ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	08/13/2019
2	A0	NEW RELEASE	HZF	10/12/2013

NO.

REV.

REVISIONS

CHK

DATE