



File No.	697BH09806	SHEET	1/1

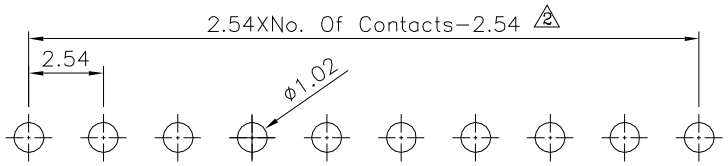

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05) 2

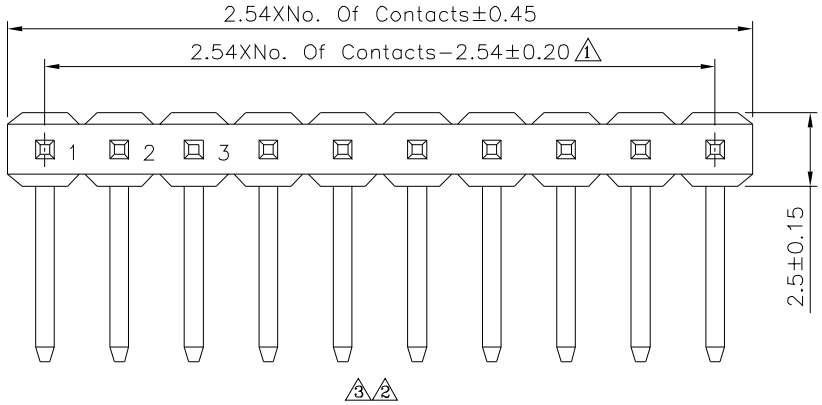

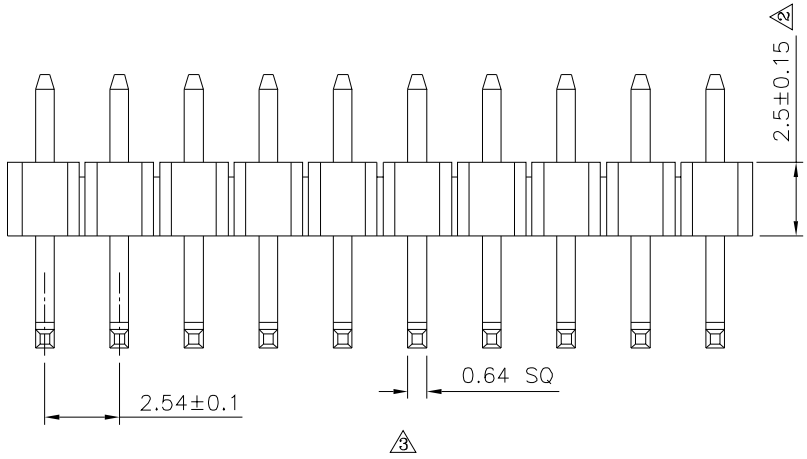

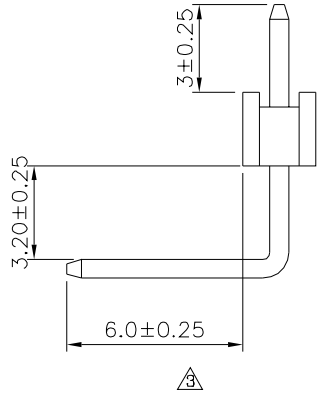

SPECIFICATION
Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PBT(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	00840	
APPROVED BY	MEI	
CHECKED BY	HZF	
DRAWING BY	CYP	
SCALE	NONE	REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
2 X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	02/09/2017
2	A2	Modify Data	HZF	02/21/2014
1	A1	Modify Data	HZF	02/22/2011
0	A0	NEW RELEASE	HZF	12/09/2009