
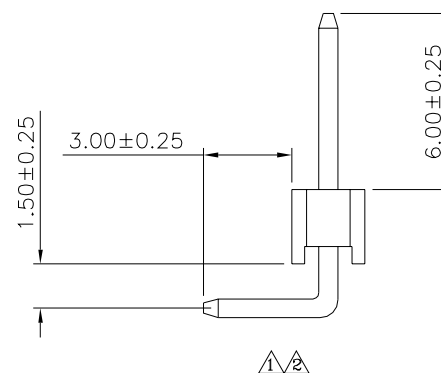
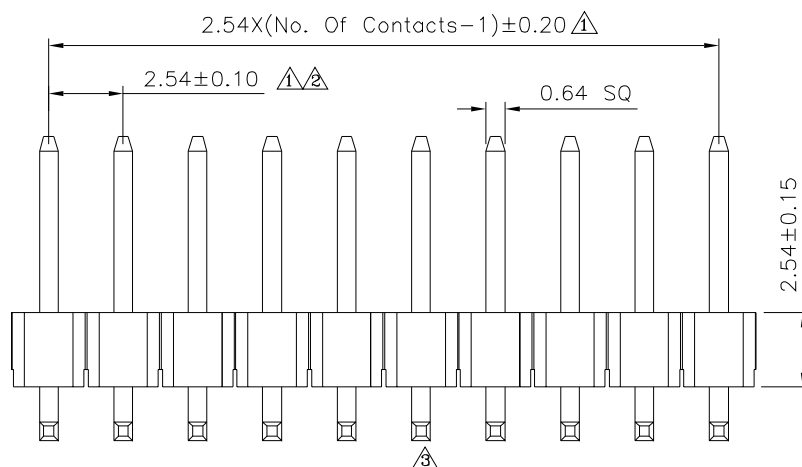


Recommended P.C.B. Layout

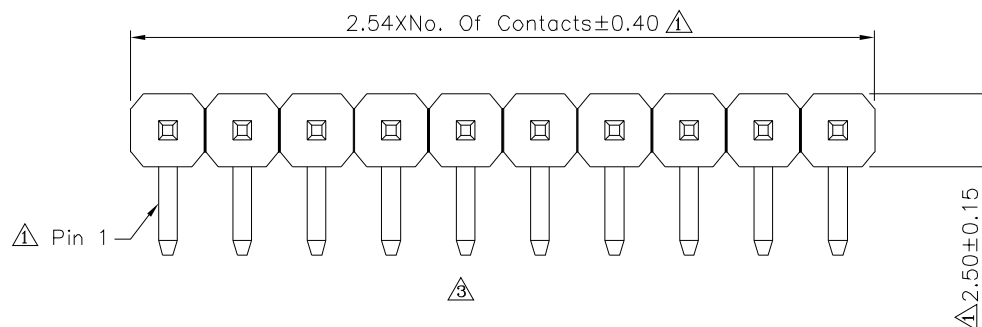

# △ SPECIFICATION

- Current:3A
- △ Operation Temperature:−40°C~+105°C
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Withstanding Voltage:1000V AC RMS
- Housing:PBT(UL94V−0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:2~40 Contacts
- RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

00887

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A3

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK  | DATE       |
|-----|------|-------------|------|------------|
| △3  | A3   | Modify Data | HZF  | 10/28/2025 |
| △2  | A2   | Modify Data | HZF  | 03/14/2014 |
| △1  | A1   | Modify Data | HZF  | 06/22/2010 |
| △0  | A0   | NEW RELEASE | SHIN | 03/06/2006 |