
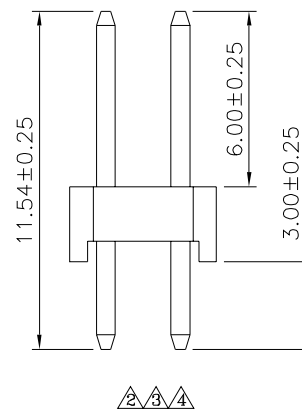
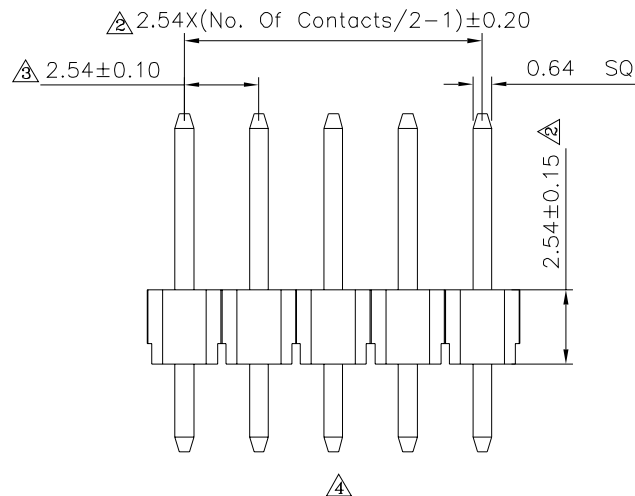


Recommended P.C.B. Layout

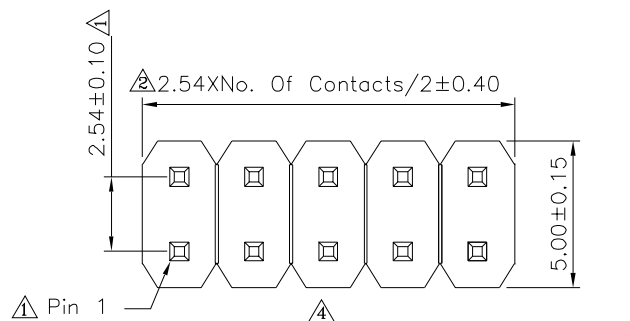

△△ SPECIFICATION

- Current: 3A
- Withstanding Voltage: 1000V AC/Minute
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megaohms Min.
- Operation Temperature: -55°C ~ +105°C
- Housing: PBT(UL94V-0), Black
- Contact: Brass, Gold Flash Over Nickel
- No. Of Contacts: 04 ~ 80 Pin
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

00992

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ .X ± 0.38
△ .XX ± 0.25
△ .XXX ± 0.05

UNIT mm

△ A4	Modify Data	HZF	08/22/2019
△ A3	Modify Data	HZF	03/31/2014
△ A2	Modify Data	HZF	08/19/2010
△ A1	Modify Data	HZF	04/22/2009
△ A0	NEW RELEASE	SHIN	03/06/2006
NO. REV.	REVISIONS	CHK	DATE