
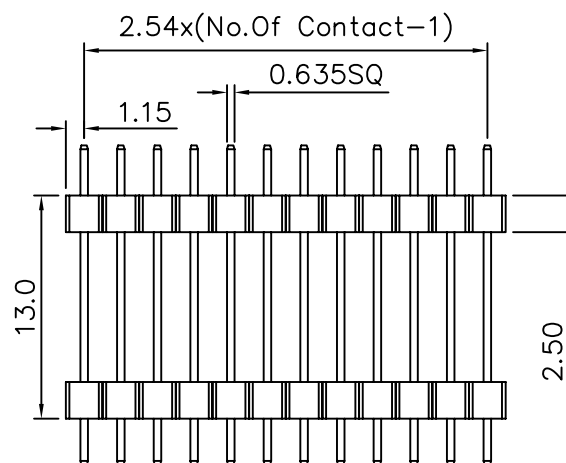


SPECIFICATIONS

Current Rating : 1AMP
 Insulation Resistance : 5000 Megohms Min. At DC 500V
 Contact Resistance : 20 Milliohms Max.At DC 100mA
 Operating Temperature : -55°C To +105°C
 Contact : Brass,Gold Flash
 Insulator : 30% Glass Filled PBT,UL 94V-0

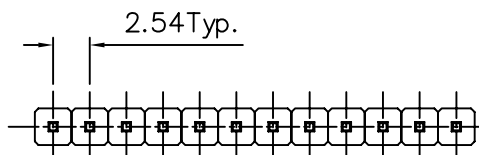

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01136

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.


SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

BECKY

2004/06/17