

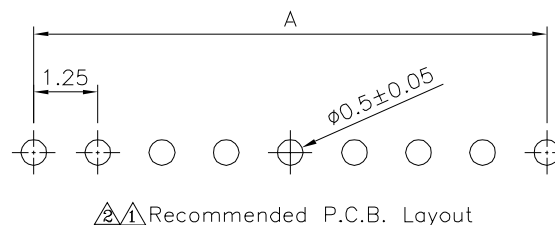


△△ SPECIFICATION



Current Rating:1A AC/DC
Voltage Rating:125V AC/DC
Dielectric Voltage:250V AC For One Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Operation Temperature:-40°C~+85°C
Insulator:HTN(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

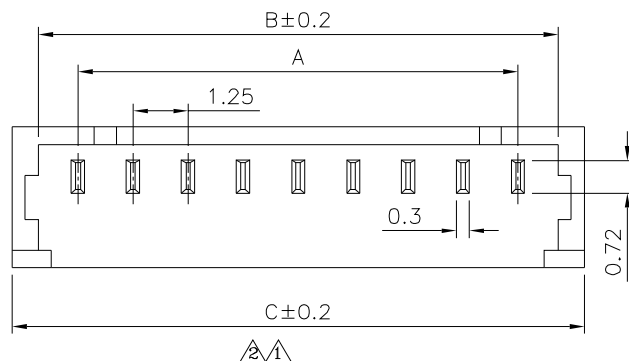


△△ Recommended P.C.B. Layout

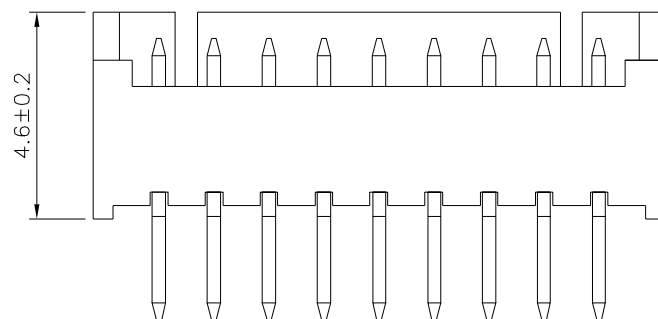


△△ 4P-15P

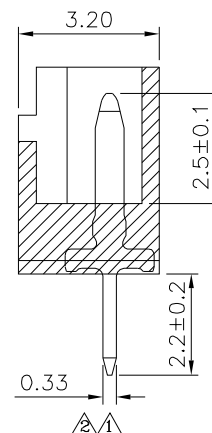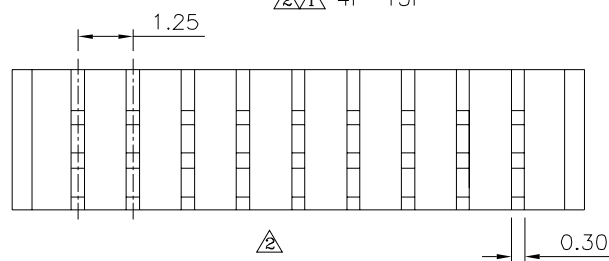

△△



2P



3P

△△ Lock Window View

△△

Pin	A	B	C
02	1.25	3.15	4.25
03	2.50	4.40	5.50
04	3.75	5.65	6.75
05	5.00	6.90	8.00
06	6.25	8.15	9.25
07	7.50	9.40	10.50
08	8.75	10.65	11.75
09	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.40	15.50
12	13.75	15.65	16.75
13	15.00	16.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

01205

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.25
.XX ±0.15

SCALE NONE

REV.

B2

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
△2	B2	Modify Data	HZF	02/26/2015
△1	B1	Modify Data	HZF	12/04/2013
△0	B0	NEW RELEASE	HZF	12/10/2009