
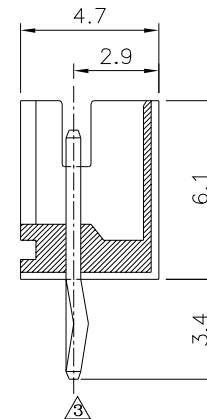
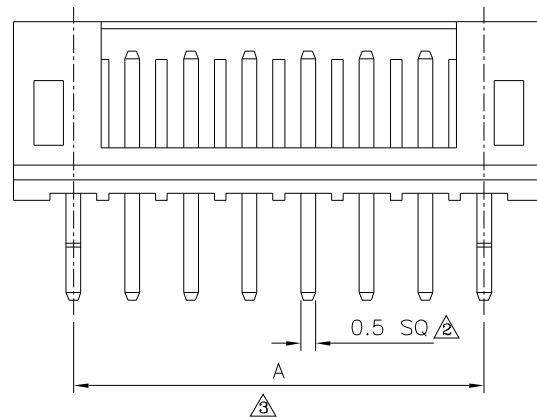


△ Recommended PCB Layout
Thickness: 0.8~1.6mm

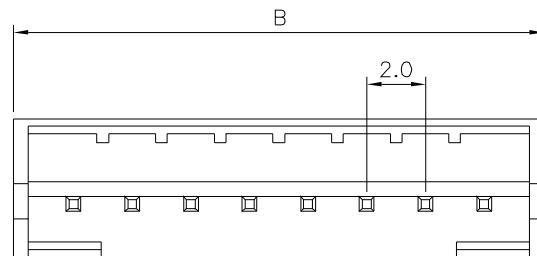

SPECIFICATION

Current Rating: 2A
Voltage Rating: 100V AC
Contact Resistance: 20 Milliohms Max.
Dielectric Withstanding Voltage: 800V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
Temperature Range: -25°C ~ +85°C
Insulator: PA66(UL94V-0), Nature
Contact: Brass, Tin Plated
RoHS Compliant

Pin	A	B
2	2.0	6.1
3	4.0	8.1
4	6.0	10.1
5	8.0	12.1
6	10.0	14.1
7	12.0	16.1
8	14.0	18.1
9	16.0	20.1
10	18.0	22.1
11	20.0	24.1
12	22.0	26.1
13	24.0	28.1
14	26.0	30.1
15	28.0	32.1
16	30.0	34.1

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01541

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.3
.XX ±0.2
ANG.

UNIT
mm



NO.

REV.

A3

NO.

REV.

NO.

REV.

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

REVISIONS

REVISIONS

HZF

HZF

BECKY

CHK

CHK

CHK

CHK

02/05/2015

03/23/2010

2005/02/17

DATE

DATE

DATE

DATE