

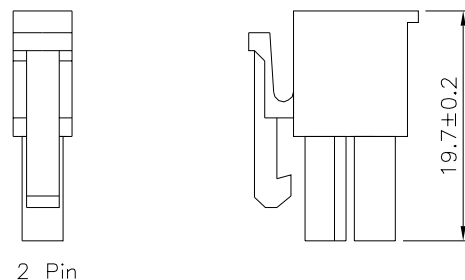



SPECIFICATION



Current Rating:8A AC,DC
Voltage Rating:500V AC,DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-25°C~+105°C
⚠ Insulator:PA66
RoHS Compliant

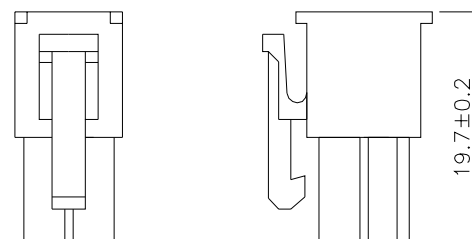


2 Pin

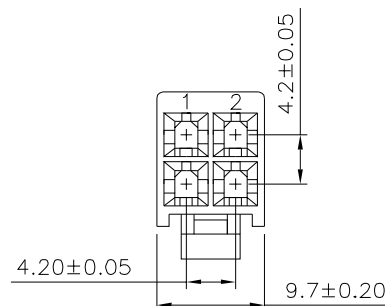

4 Pin

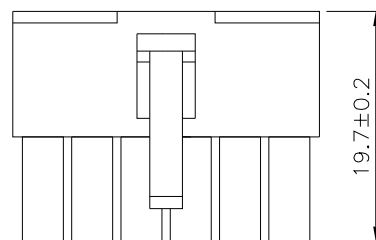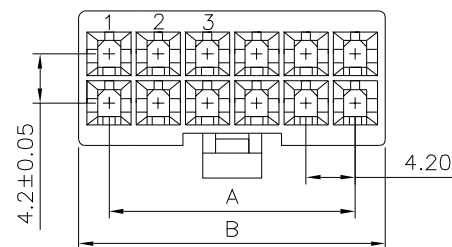

06~24 Pin



Pin	A		B	
02	—	±0.20	5.5	±0.30
04	4.20		9.7	
06	8.40		13.9	
08	12.60	±0.30	18.1	±0.40
10	16.80		22.3	
12	21.00		26.5	
14	25.20		30.7	
16	29.40	±0.40	34.9	±0.50
18	33.60		39.1	
20	37.80		43.3	
22	42.00		47.5	
24	46.20		51.7	

PS. Flame Retardant & Insulator Color:
UL94V-2 Nature Color
UL94V-0 White Color
UL94V-2 Black Color

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠

02227

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG.

SCALE

NONE

REV.

B1

UNIT
mm



⚠ B1

Modify Data

HZF

12/27/2018

⚠ B0

NEW RELEASE

HZF

07/08/2014

NO. REV.

REVISIONS

CHK

DATE