

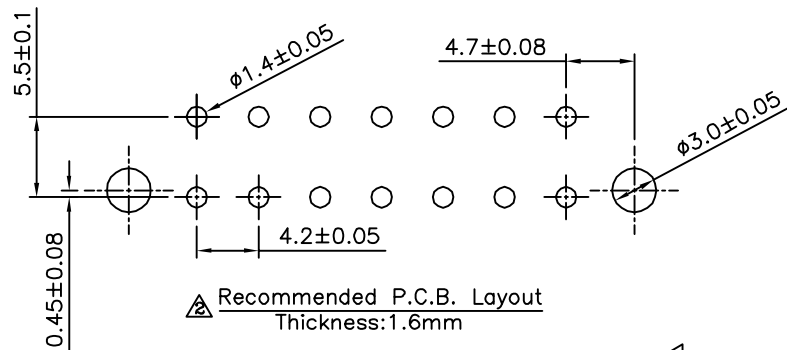
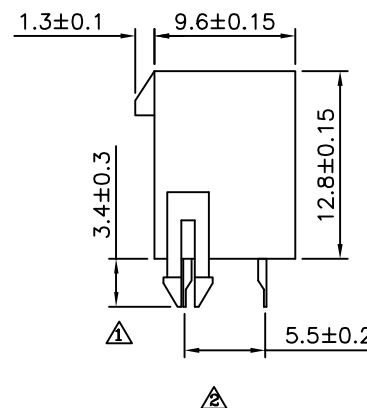


△△ SPECIFICATION

Current Rating:8A AC/DC
Voltage Rating:500V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
Temperature Range:-25°C To +85°C
Contact:Brass,Tin Plated
Insulator:PA66(UL94V-2),Nature
RoHS Compliant

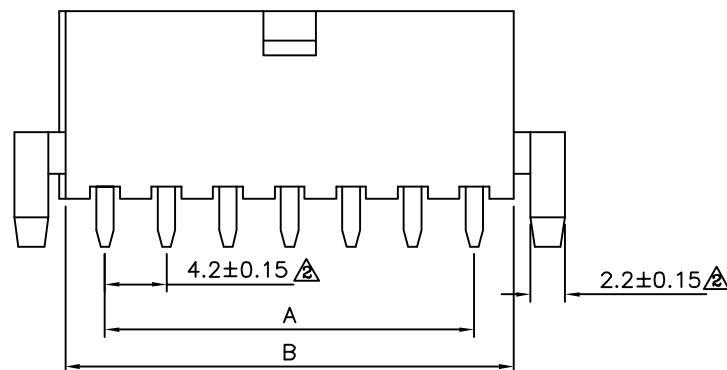

△ Recommended P.C.B. Layout
Thickness:1.6mm

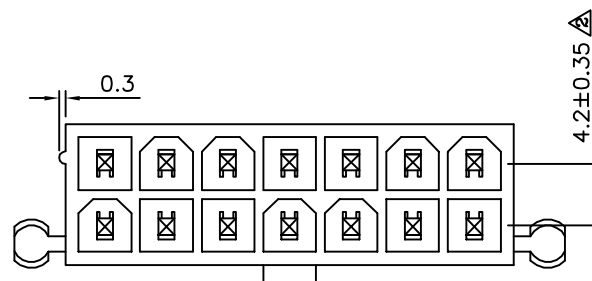

△△	Pin	A	B	TOL.
	2		5.2	± 0.20
	4	4.20	9.4	
	6	8.40	13.6	
	8	12.60	17.8	
	10	16.80	22.0	± 0.30
	12	21.00	26.2	
	14	25.20	30.4	
	16	29.40	34.6	
	18	33.60	38.8	± 0.40
	20	37.80	43.0	
	22	42.00	47.2	
	24	46.20	51.4	

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02249

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ $X \pm 0.5$
△ $XX \pm 0.25$
△ $XXX \pm 0.08$

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	05/09/2015
△ B1		Modify Data	HZF	10/20/2009
△ B0		NEW RELEASE	INGRID	12/14/2007