

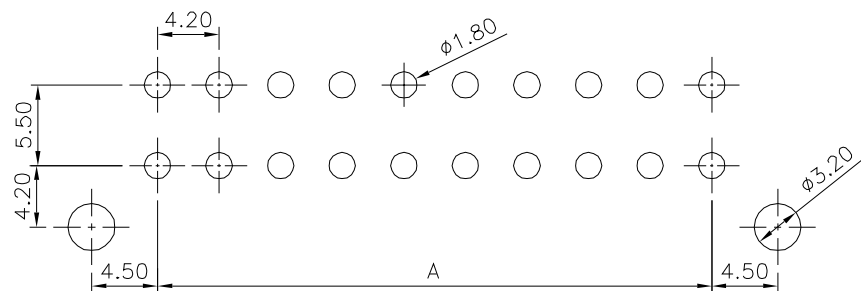
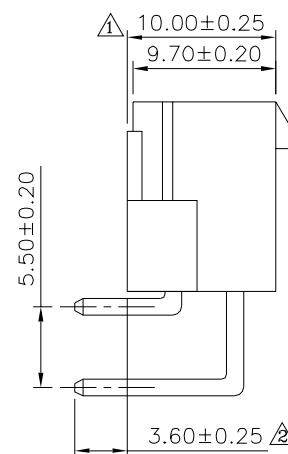


SPECIFICATION

- Current Rating:7A AC,DC
- Voltage Rating:600V AC,DC
- Withstanding Voltage:1500V AC/Minute
- Insulation Resistance:1000 Megaohms Min.
- Contact Resistance:20 Milliohms Max.
- Temperature Range:-25°C~+85°C
- Insulator:PA66,UL94V-2,Nature
- Contact:Brass,Tin Plated
- RoHS Compliant

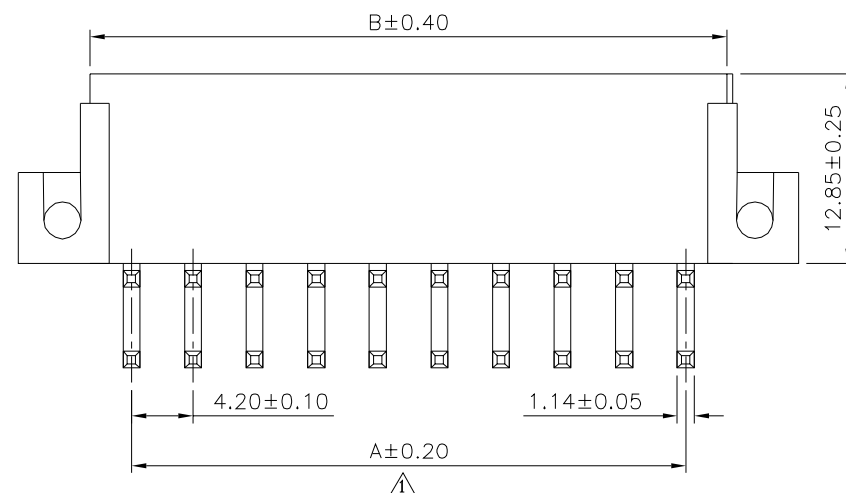

Recommended P.C.B. Layout

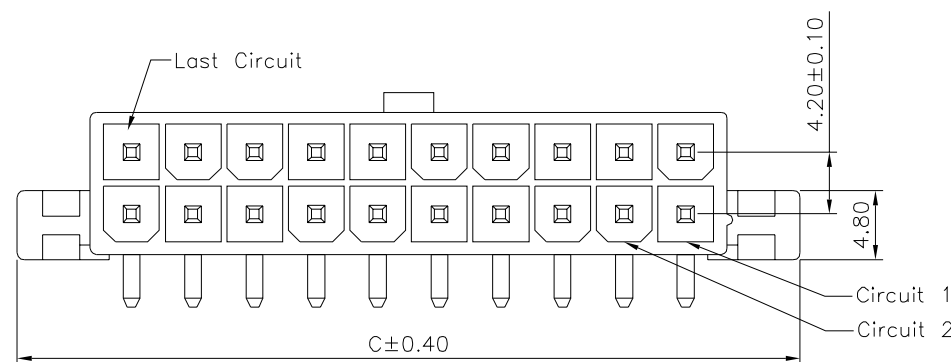

Pin	A	B	C
02	--	5.60	15.20
04	4.20	9.80	19.40
06	8.40	14.00	23.60
08	12.60	18.20	27.80
10	16.80	22.40	32.00
12	21.00	26.60	36.20
14	25.20	30.80	40.40
16	29.40	35.00	44.60
18	33.60	39.20	48.80
20	37.80	43.40	53.00
22	42.00	47.60	57.20
24	46.20	51.80	61.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02262

02262

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF


DRAWING BY CYP

REV. A2


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.30
X. ± 0.25
XX ± 0.20
XXX ± 0.05
ANG. $\pm 1^\circ$

UNIT mm


NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	01/11/2019
A1		Modify Data	HZF	11/10/2014
A0		NEW RELEASE	HZF	05/17/2011

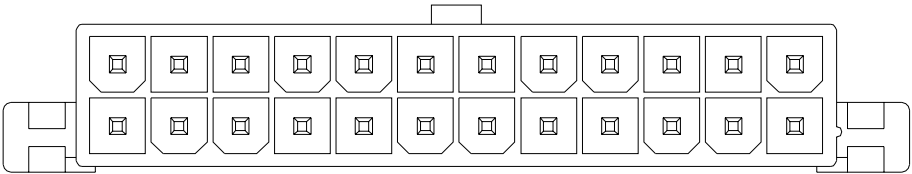


2X12P

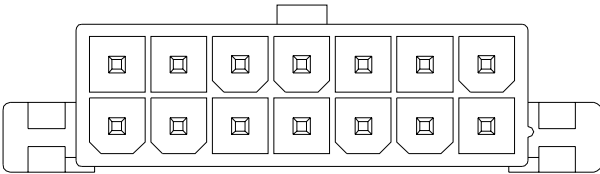


2X07P

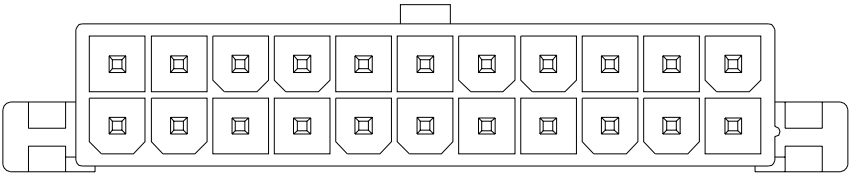


2X11P

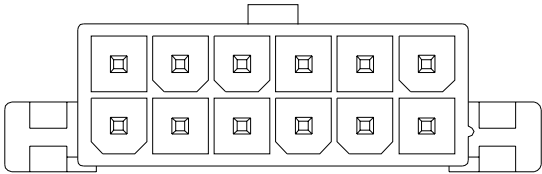


2X06P

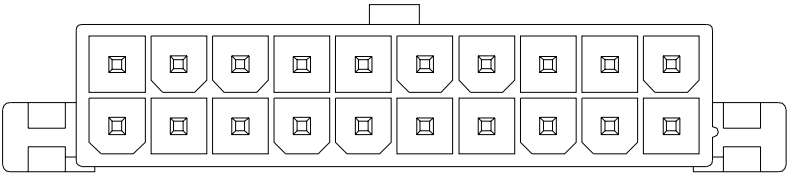


2X10P

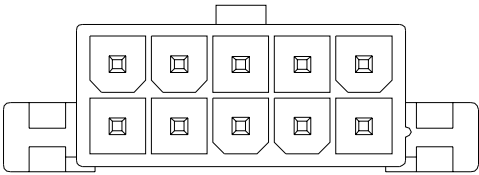


2X05P

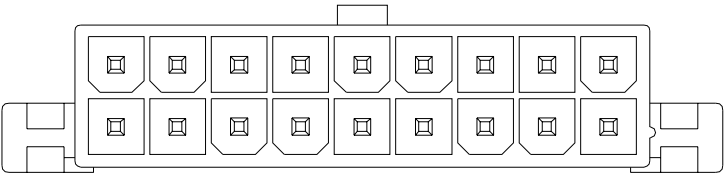


2X09P

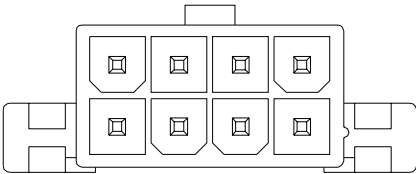


2X04P




2X02P

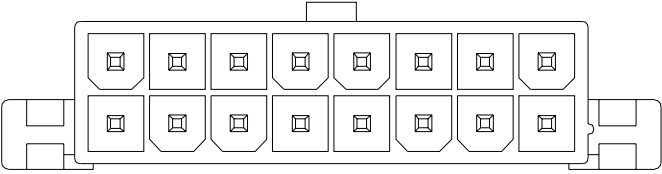

2X08P

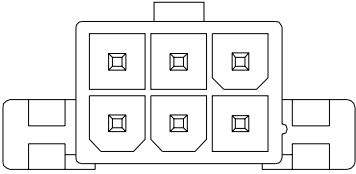

2X03P



2X01P

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02262

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
 X: ± 0.30
 .X: ± 0.25
 .XX: ± 0.20
 .XXX: ± 0.05
ANG. $\pm 1^{\circ}$

UNIT

mm



	A2	Modify Data	HZF	01/11/2019	
	A1	Modify Data	HZF	11/10/2014	
	A0	NEW RELEASE	HZF	05/17/2011	
NO.	REV.	REVISIONS	CHK	DATE	