
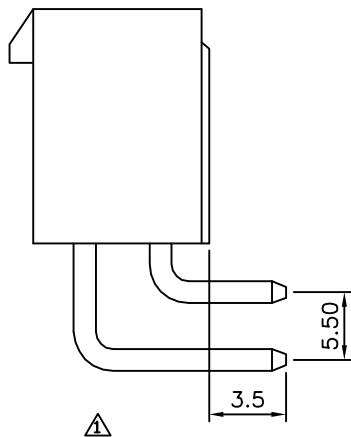
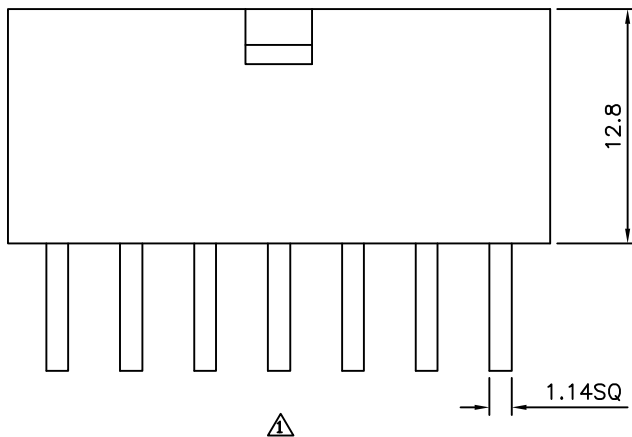


△ SPECIFICATION
Current Rating:8A AC/DC
Voltage Rating:500V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-2),Nature
Contact:Brass,Tin Plated
Applicable PC Board Thickness:1.6mm
RoHS Compliant

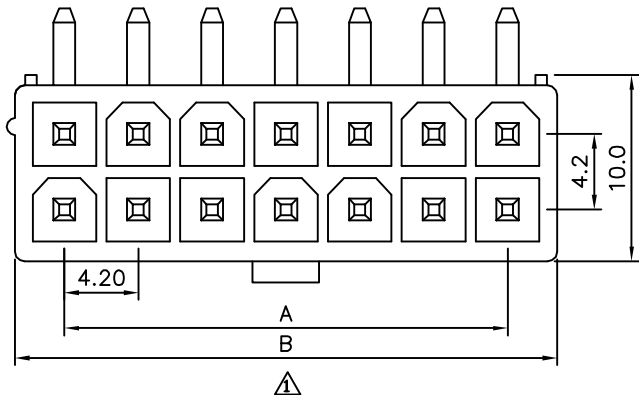

△ Pin	A	B
02	4.20	5.2
04	8.40	9.4
06	12.60	13.6
08	16.80	17.8
10	21.00	22.0
12	25.20	26.2
14	29.40	30.4
16	33.60	34.6
18	37.80	38.8
20	42.00	43.0
22	46.20	47.2
24	50.40	51.4

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02273		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.2 .XXX ±0.08	
		EMILY			
		CHECKED BY			
		HZF			
		DRAWING BY			
		HAO			
SCALE	NONE	REV.	A1	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/25/2014
△ A0		NEW RELEASE		