

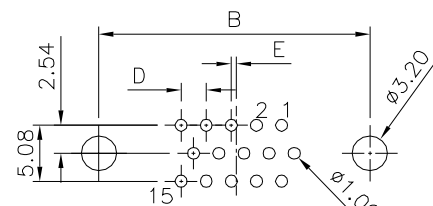
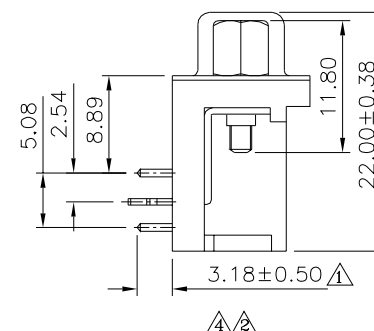
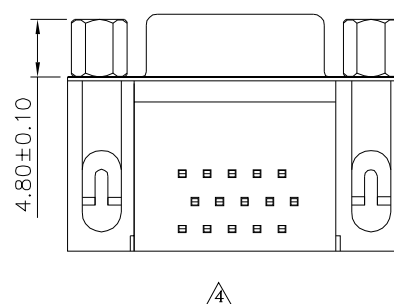
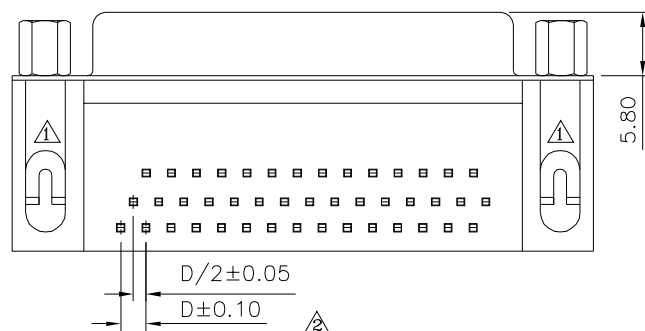


△ 26,44,62 Pin
△ Recommended P.C.B. Layout

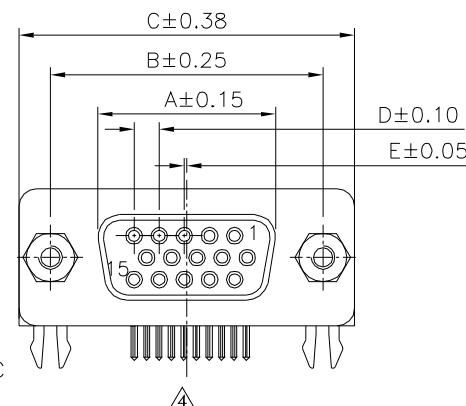

15 Pin
△ Recommended P.C.B. Layout

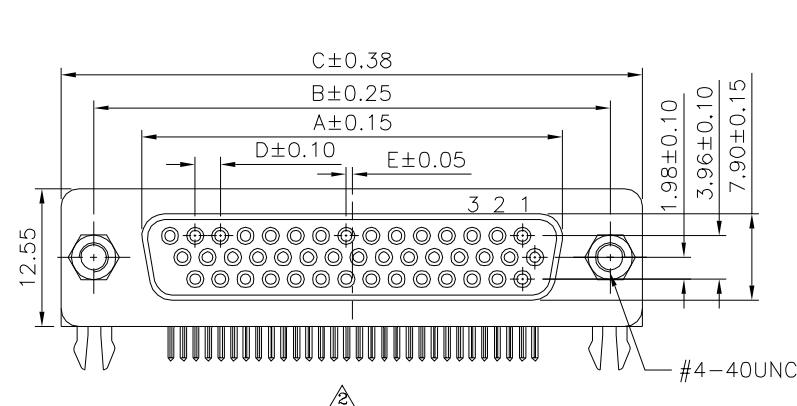

△ SPECIFICATION

- △ Current Rating:1 Amps
Withstanding Voltage:500V For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Operating Temperature:-40°C~+85°C
- △ Insulator:PBT+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shell:SPCC,Nickel Plated
Boardlock:SPCC,Tin Plated
Screw:12L14,Nickel Plated
RoHS Compliant

Pin	A	B	C	D	E
15	16.33	24.99	30.81	2.29	0.25
26	24.80	33.32	39.20	2.29	0.50
44	38.38	47.04	53.04	2.29	0.50
62	54.84	63.50	69.40	2.41	0.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

02632

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38 .X* ±3*
.XX ±0.25 .XX* ±1*
.XXX ±0.05 .XXX* ±0.5*

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B4		Modify Data	HZF	03/30/2019
△ B3		Modify Data	HZF	05/08/2018
△ B2		Modify Data	HZF	12/24/2015
△ B1		Modify Data	HZF	09/19/2014
△ B0		NEW RELEASE	HZF	04/10/2013