


SPECIFICATIONS

Current Rating: 2 AMP
Dielectric Withstanding Voltage: 1000V Per Minute
Insulation Resistance: 1000 Megohms Min, At 500V DC
Contact Resistance: 15 Milliohms Max. 10s
Operating Temperature: -55°C ~ +105°C
Insulator: PBT+30% Glass Fiber (UL 94V-0), Black
Contact: Brass, Gold Flash On Mating End, Tin
On Termination End
With Entire Contact Nickel Underplated
Shell: Steel, Nickel Plated

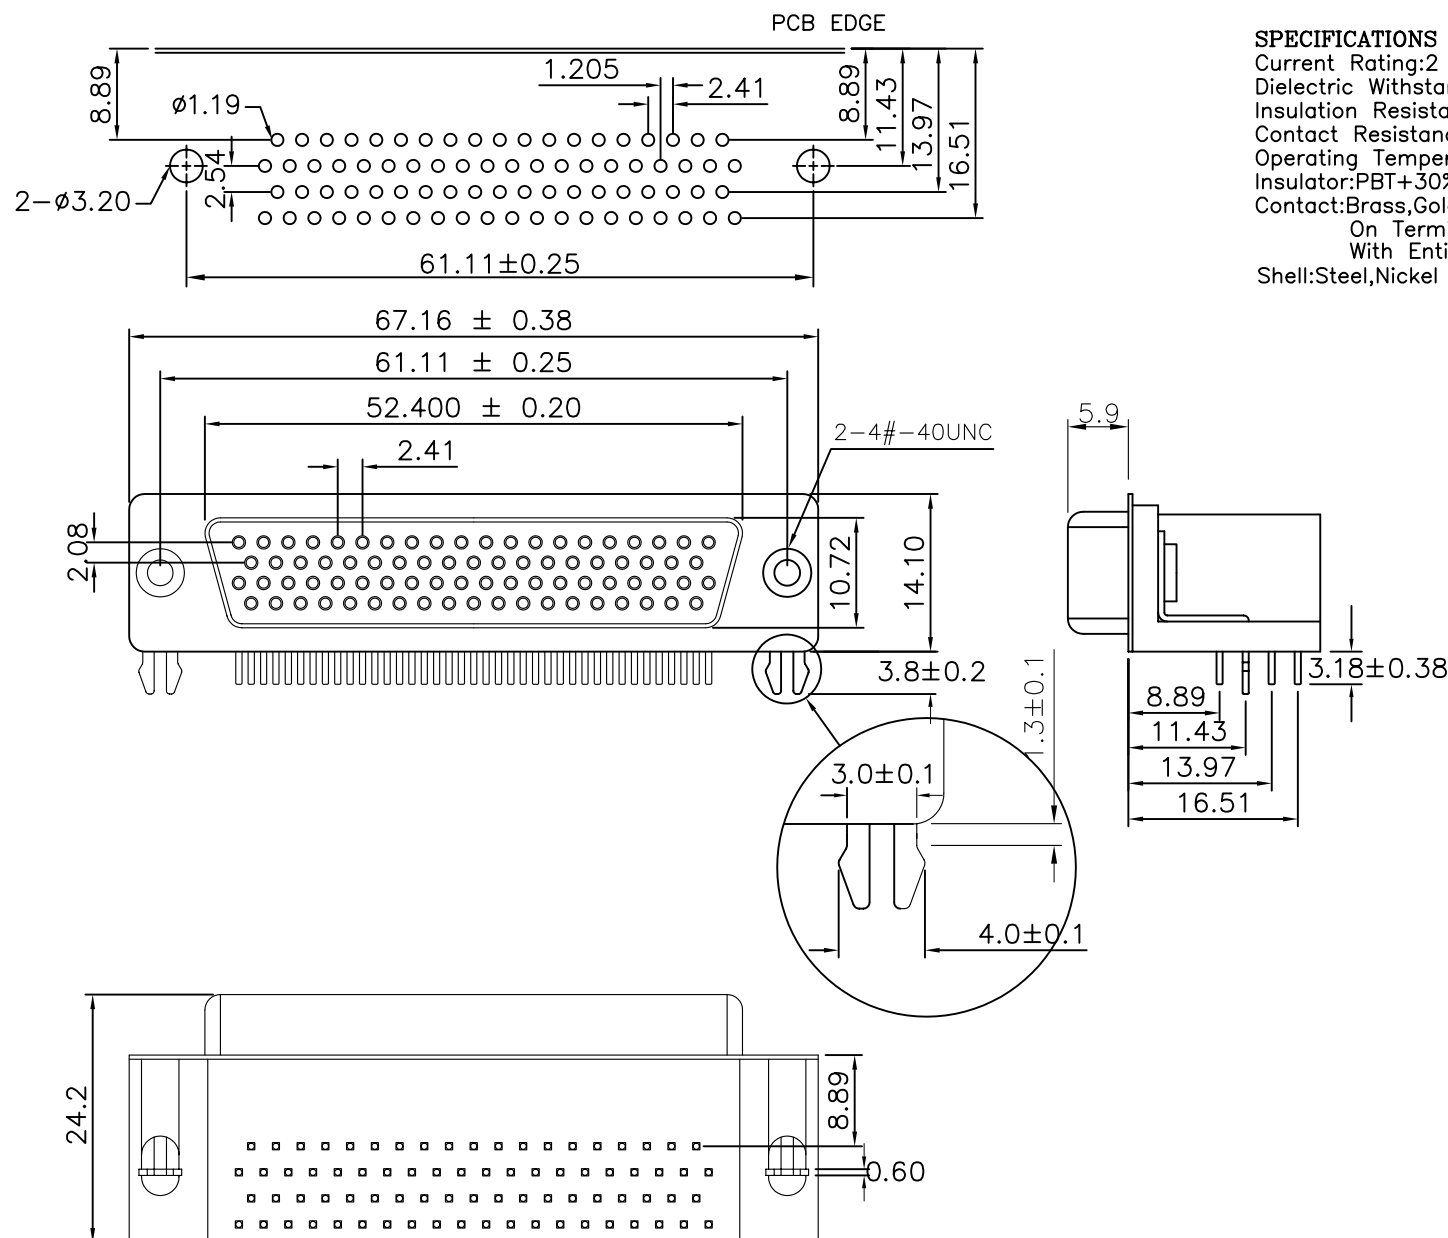

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02637

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15

.XXX ±0.05

SCALE


NONE

REV.

A

UNIT

mm



NO. REV.

A

NEW RELEASE

REVISIONS

RAN

CHK

DATE