



△△ SPECIFICATION


Current Rating:1 Amps
 Withstand Voltage:500V For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),White
 Contact:C2608,Gold Flash Over Nickel
 Shell:SPCC,Front:Nickel Plated,Rear:Tin Plated
 RoHS Compliant

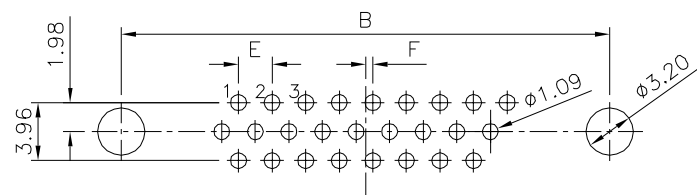


△△ Recommended P.C.B. Layout(26,44,62 Pin)

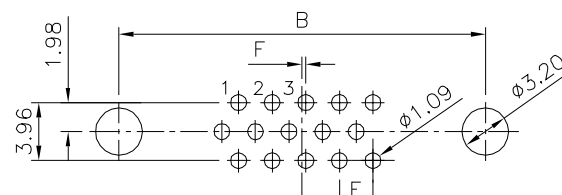


△△ Recommended P.C.B. Layout(15 Pin)

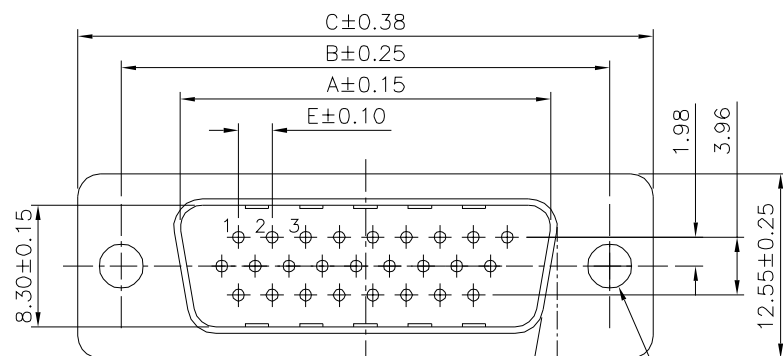


△△ 26,44,62 Pin

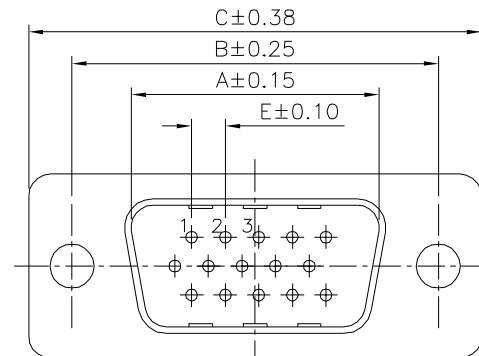

△△ 15 Pin

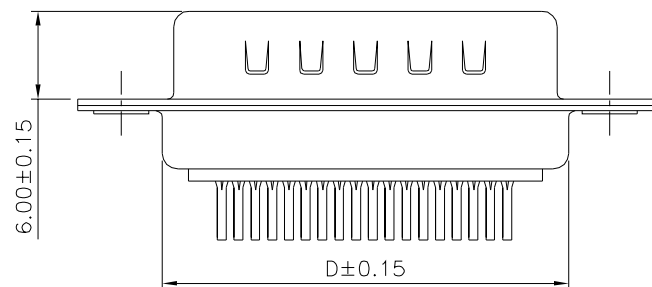

△△



△△ Position	A	B	C	D	E	F
15	16.92	24.99	30.81	19.20	2.29	0.25
26	25.25	33.32	39.20	27.70	2.29	0.50
44	38.96	47.04	53.04	41.10	2.29	0.50
62	55.42	63.50	69.40	57.30	2.41	0.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

02697

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.25 △.X* ±3*
 .XX ±0.25 △.XX* ±1*
 .XXX ±0.05 △.XXX* ±0.5*

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	05/18/2019
△	A1	Modify Data	HZF	03/02/2011
△	A0	NEW RELEASE	HZF	03/03/2009