

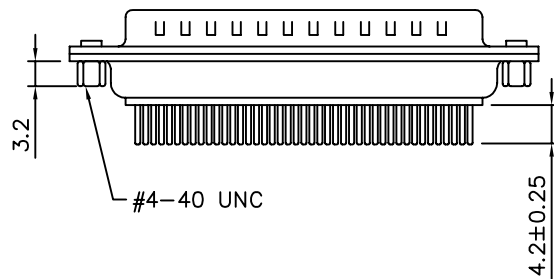


SPECIFICATIONS

Current Rating : 1 AMP
 Dielectric Withstanding Voltage:AC 500V RMS
 Insulation Resistance:500Megohms Min.At DC 500V
 Contact Resistance:30 Milliohms Max.
 Operating Temperature:-55°C To 105°C
 Contact :Brass,Gold Plated
 Insulator:PBT,UL 94V-0
 Shell:Cold Rolled Steel,Tin Plated

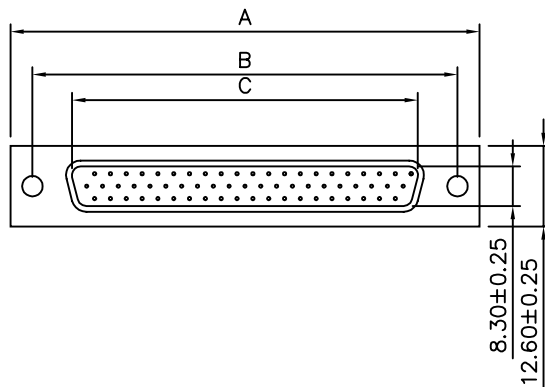

Positions	A±0.25	B±0.25	C±0.25
15	30.80	25.00	16.92
26	39.20	33.32	25.25
44	53.05	47.04	38.96
62	69.40	63.50	55.42

4UCON

元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No.

02699

APPROVED BY

MEI

CHECKED BY

RAN


DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X
.XX ±0.10
.XXX

UNIT
mm



AREA

REVISIONS

CHK

DATE