

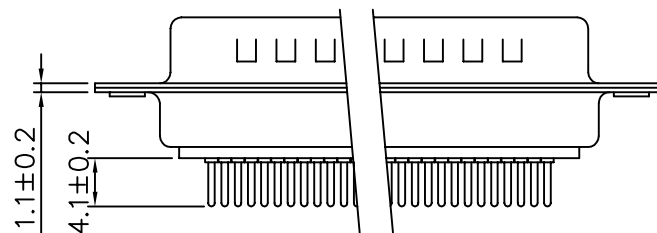


SPECIFICATIONS:

Contact Current Rating:1 Ampere
Dielectric Withstanding Voltage: AC 500V R.M.S.
Insulation Resistance : 500Megohms Min. At DC 500V
Contact Resistance:30Milliohms. Max.
Operating Temperature:-55°C ~+105°C
Contact:Brass , Gold Flashed
Insulator:P.B.T.UL94V-0 Rated
Shell:Cold Rolled Steel,Nickel ,Tin,Zinc Plated

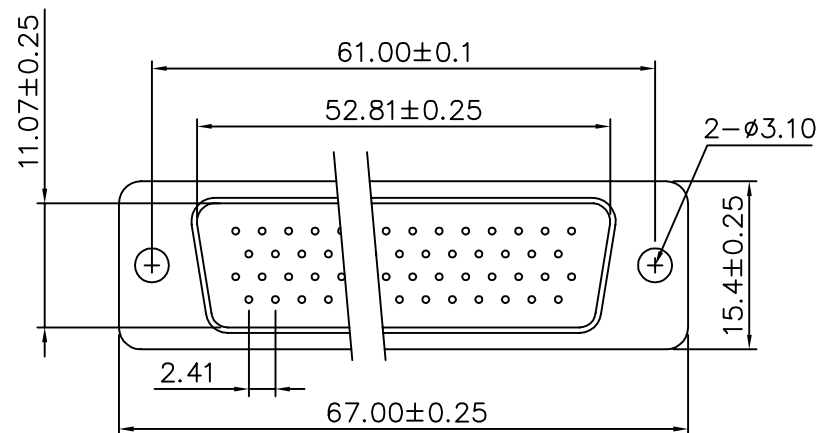

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02710

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG

UNIT

mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE