



△△ SPECIFICATION


△ Current Rating: 1 Amps
Withstanding Voltage: 1000V (1 Minute)
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min. At 500V DC
Operating Temperature: -50°C ~ +105°C
Shell: SPCC, Front: Nickel Plated, Rear: Tin Plated
Insulator: PBT+30%G.F. (UL94V-0), Black
Contact: Brass, Gold Flash On Contact Area,
Tin Plated On Solder Tails, Over Nickel
RoHS Compliant

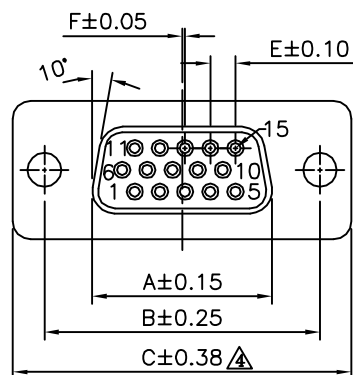


△

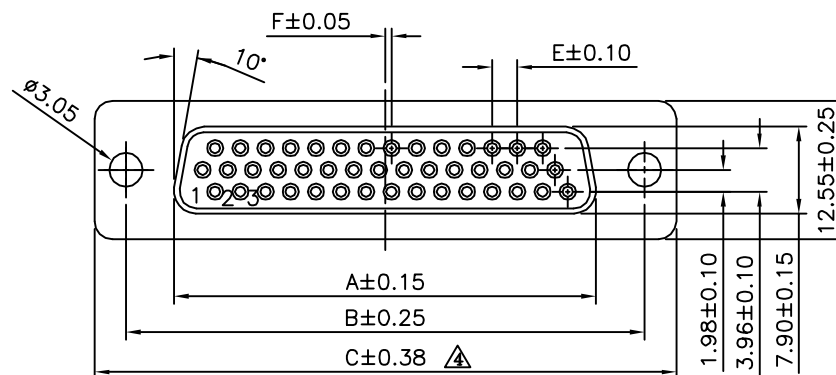


△

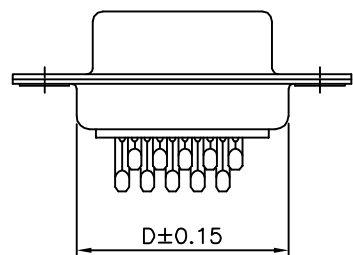

△△ 15 Pin

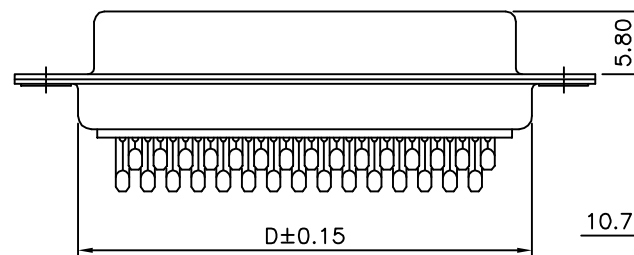

△△ 26, 44, 62 Pin

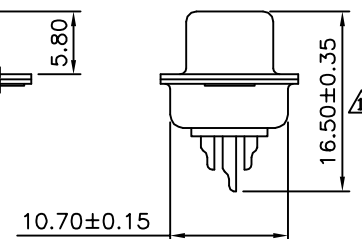

△

△ Pin	A	B	C	D	E	F
15	16.33	24.99	30.81	19.20	2.29	0.25
26	24.80	33.32	39.20	27.60	2.29	0.50
44	38.38	47.04	53.04	41.00	2.29	0.50
62	54.84	63.50	69.40	57.30	2.41	0.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02750

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X' ±3'
.XX ±0.25 .XX' ±1'
.XXX ±0.05 .XXX' ±0.5

UNIT
mm

△ A4

Modify Data

HZF

04/29/2015

△ A3

Modify Data

HZF

10/25/2013

△ A2

Modify Data

HZF

05/10/2012

△ A1

Modify Data

HZF

07/09/2009

△ A0

NEW RELEASE

SHIN

10/12/2006

NO. REV.

REVISIONS

CHK

DATE