


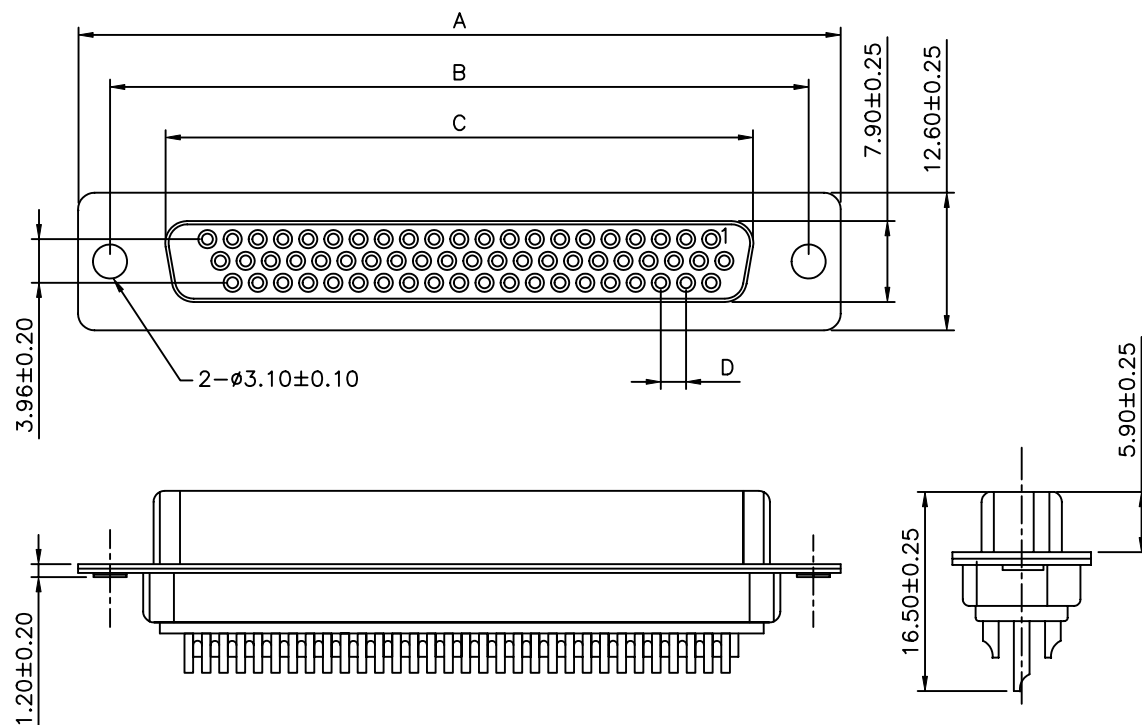

SPECIFICATION

Current Rating:1A Max.

Dielectric Withstanding Voltage:500V AC

For 1 Minute

Contact Resistance:30 Milliohms Max.

Insulation Resistance:1000 Megohms Min.

At DC 500V

Total Mating Force:8.0 Kgf Max.

Total Unmating Force:4.0 Kgf Min.

Temperature Range:-55°C~+105°C

RoHS Compliant

P/N	Insulator
02756.02765.02772.02776	Blue
02746.02761.02771.02775	Black
02758.02766.02773.02777	White

No.	A ± 0.25	B ± 0.25	C ± 0.25	D ± 0.20
15	30.80	25.00	16.33	2.29
26	39.20	33.32	24.66	2.29
44	53.05	47.04	38.38	2.29
62	69.40	63.50	54.84	2.41

4	Back-Shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-Shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
2	Contact	15~62	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94V-0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02772

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE.X ± 0.3 .XX ± 0.20 .XXX ± 0.100 ANG. $\pm 1^\circ$

SCALE

NONE

REV.

A0

UNIT
mmA0
NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

06/01/2008

DATE