



SPECIFICATION

Current Rating: 5 Amps

Withstanding Voltage: 1000V(One Minute)

Contact Resistance: 20 Milliohms Max.

Insulation Resistance: 1000 Megaohms Min.
At 500V DC

Operating Temperature: -50°C~+105°C

Shell: SPCC, Nickel Plated


Insulator: PBT+30%G.F.(UL94V-0)

Contact: Brass, Gold Flash On Contact Area, Tin
Plated On Solder Tail, Under Nickel

Z Flake: SPCC, Tin Plated

Screw: 12L14, Nickel Plated

RoHS Compliant

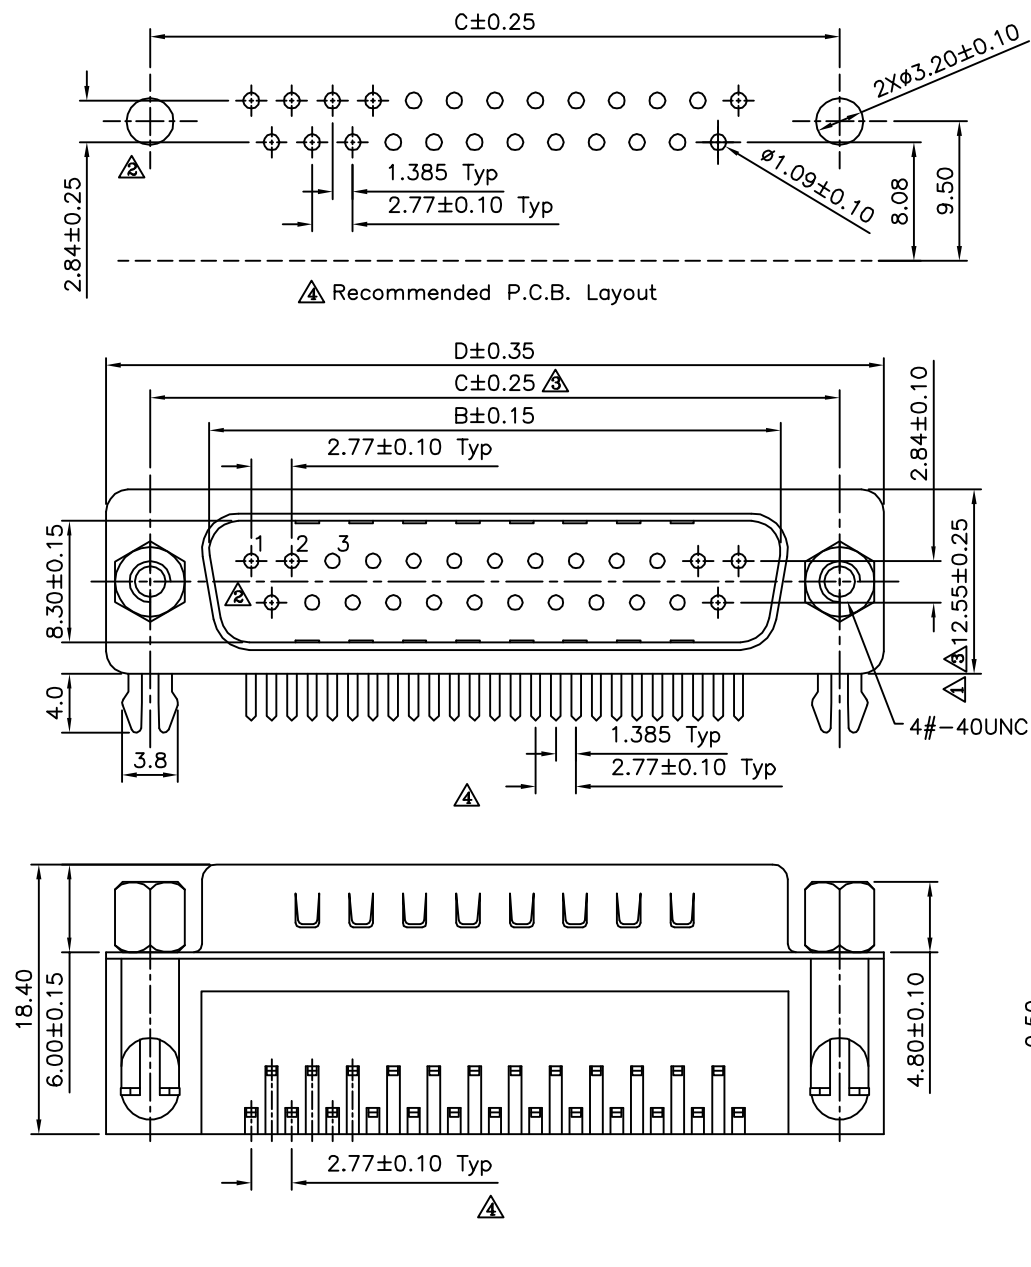

Pin	B	C	D
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

DRAWING No.

02843

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE $.XX \pm 0.38$ $.X^* \pm 3^*$
 $.XX \pm 0.25$ $.XX^* \pm 1^*$
 $.XXX \pm 0.05$ $.XXX^* \pm 0.5^*$ UNIT
mm

A4

Modify Data

HZF

10/27/2011

A3

Modify Dim

HZF

12/25/2008

A2

Add Layout & Pin Code

HZF

09/01/2008

A1

Modify & Add Dim.

SHIN

05/11/2007

A0

NEW RELEASE

HZF

10/23/2006

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.