

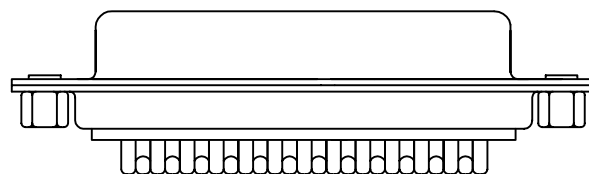


# SPECIFICATIONS:

Contact Current Rating:1 Amp  
 Dielectric Withstanding Voltage: AC 500V R.M.S.  
 Insulation Resistance : 500Megohms Min. At DC 500V  
 Contact Resistance:30Milliohms. Max.  
 Operating Temperature:-55°C ~+105°C  
 Contact:Brass ,Tin Plated  
 Insulator:P.B.T.UL94V-0 Rated  
 Shell:Cold Rolled Steel,Tin Plated

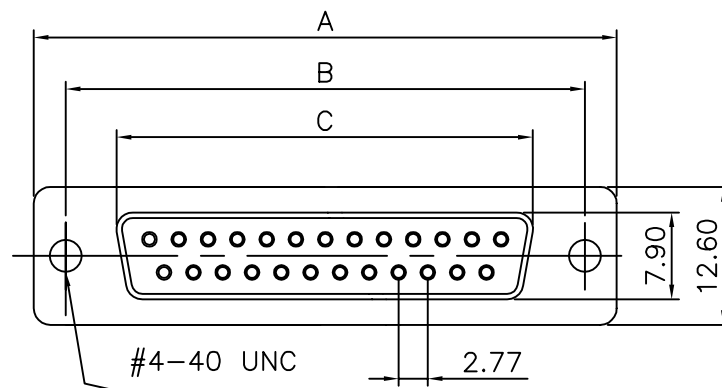

| Positions | A±0.25 | B±0.25 | C±0.25 |
|-----------|--------|--------|--------|
| 09        | 30.80  | 25.00  | 16.30  |
| 15        | 39.20  | 33.32  | 24.70  |
| 19        | 44.90  | 38.86  | 30.00  |
| 23        | 50.30  | 44.30  | 35.50  |
| 25        | 53.05  | 47.04  | 38.40  |
| 37        | 69.40  | 63.50  | 54.80  |

**4UCON**元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

03285

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED


TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT  
mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE