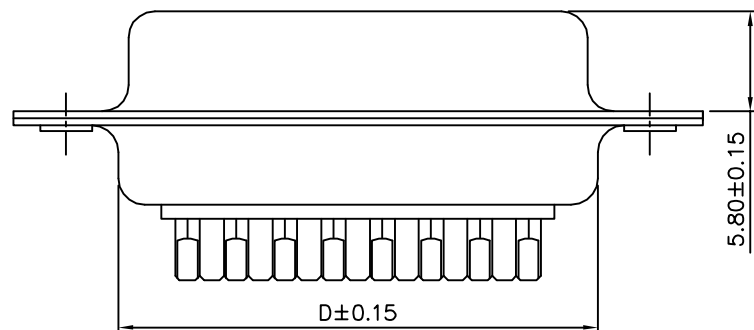
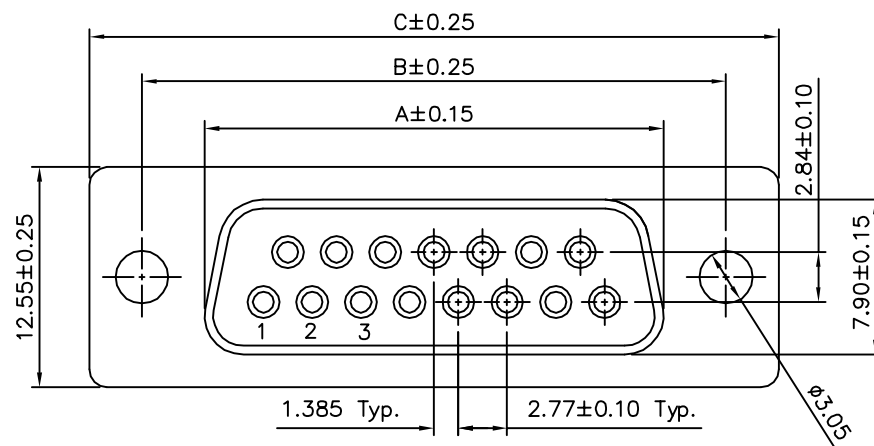


SPECIFICATION

Current Rating:1 Amps

Withstanding Voltage:500V(One Minute)

Contact Resistance:30 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

At DC 500V

Operating Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Insulator: PBT+30%G.F.(UL94V-0), Blue

Contact: Brass, Gold Flash On Contact Area

Tin Plated On Solder Tails,Over Nickel

Shell:SPCC,Nickel Plated Front,Tin Plated Rear

RoHS Compliant

Pin	A	B	C	D
09	16.33	24.99	30.81	19.20
15	24.80	33.32	39.20	27.77
25	38.38	47.04	53.04	41.11
37	54.84	63.50	69.40	57.33

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

03326

SCALE

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$.X \pm 0.38$	$.X^* \pm 3^*$
---------------	----------------

.XX	±0.25	.XX°	±1°
-----	-------	------	-----

$$.XXX \pm 0.05 \quad .XXX^* \pm 0.5$$
UNIT
mm

BO	
NO.	REV

	NEW RELEASE
--	-------------

REVISIONS

HZF

	09/27/2015
--	------------

CHK

DATE _____