


SPECIFICATIONS

Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 ⚠ Withstanding Voltage: 500VAC
 Current Rating: 3 Amp AC/5 Amp DC
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass
 Insulation: PBT+30% Glass Fiber, UL 94V-0
 Shell: Steel

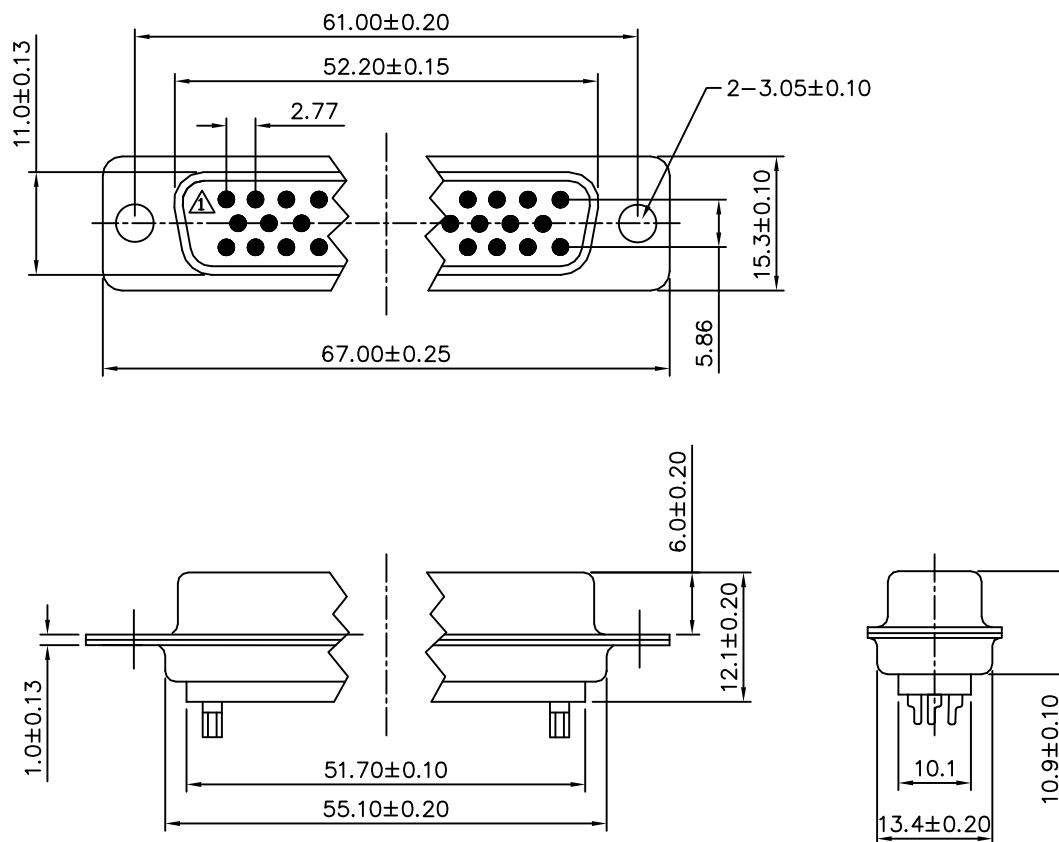

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03353

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.20 X. $\pm 2^{\circ}$
 .X ± 0.15 .X $\pm 1.0^{\circ}$
 .XX ± 0.10 .XX $\pm 0.05^{\circ}$
 .XXX ± 0.05


SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A1 Modify Drawing & Spec. SHIN 07/13/2007

A0 NEW RELEASE BECKY 09/10/2004