



△ SPECIFICATION
Shell: Zinc Alloy, Chromate Plated
Accessories (2 PCS/Set): Steel
Nickel Plated Over All
RoHS Compliant


Cable O.D. (Dim X)	7mm	8mm	9mm	10mm	12mm
-----------------------	-----	-----	-----	------	------

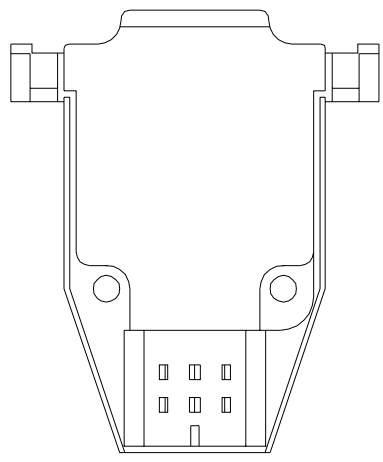


△ Cable O.D. 7.0/9.0/10.0mm

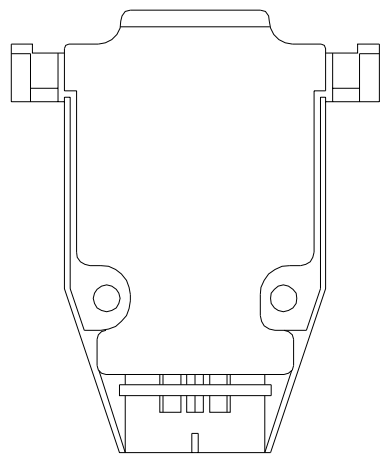


△ Cable O.D. 8.0/12.0mm

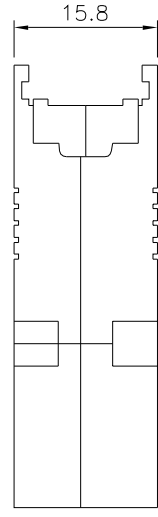


△

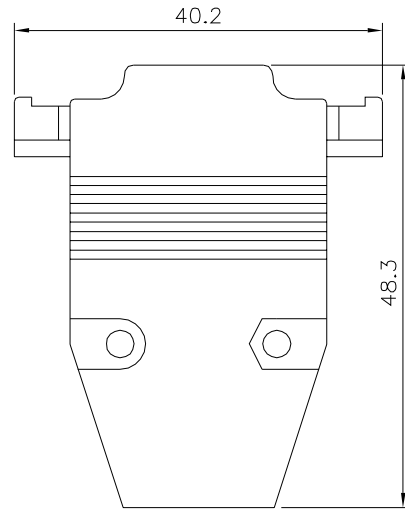


△

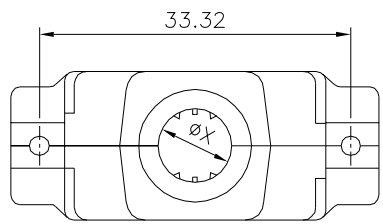


△ Cable O.D. 7.0/9.0/10.0mm

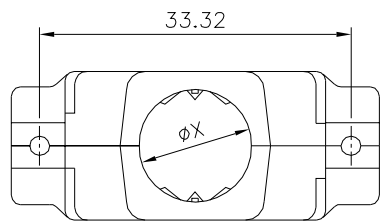


△ Cable O.D. 8.0/12.0mm

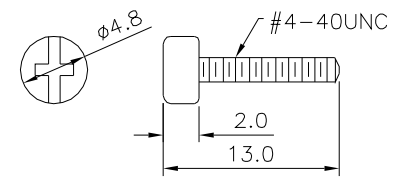


△ Screw: For O.D. 7.0/9.0/10.0mm

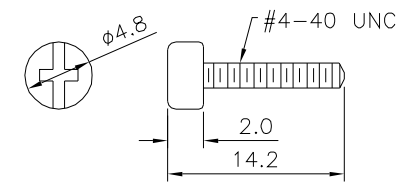

△ Screw: For O.D. 8.0/12.0mm

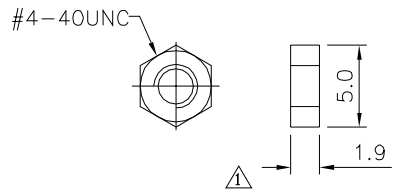

△

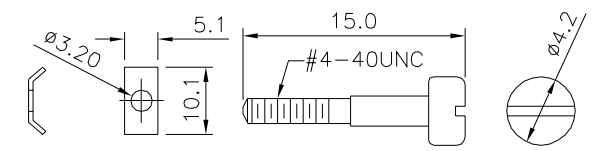

△

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △
03397

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△ X. ±0.5
△ .X ±0.3
△ .XX ±0.2
△ ANG. ±5°

SCALE NONE

REV. A3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	03/19/2019
△	A2	Modify Data	HZF	12/07/2018
△	A1	Modify Data	HZF	01/16/2014
△	A0	NEW RELEASE	SHIN	06/24/2007