
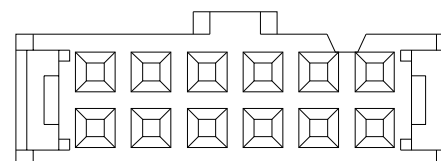
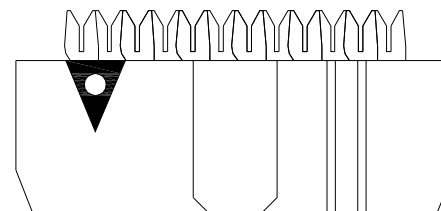
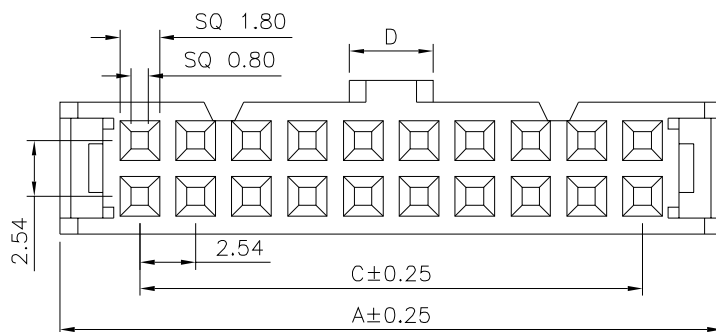

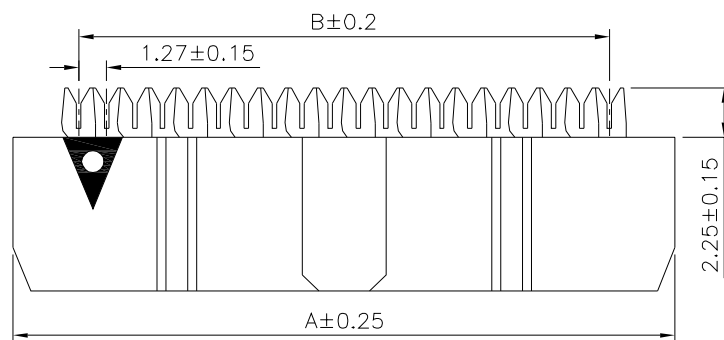



△ SPECIFICATION

Contact Resistance:1 Ohms Max.
Insulation Resistance:100 Megaohms Min. At DC 500V
Withstanding Voltage:500V AC For 1 Minute
Operation Temperature:-40°C~+105°C
Insulator:PBT+G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

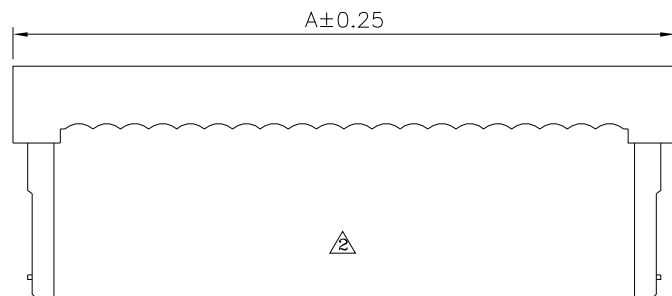

Pin	A	B	C	D
6	12.32	6.35	5.08	1.9
8	14.86	8.89	7.62	1.9
10	17.40	11.43	10.16	3.8
12	19.94	13.97	12.70	3.8
14	22.48	16.51	15.24	3.8
16	25.02	19.05	17.78	3.8
20	30.10	24.13	22.86	3.8
24	35.18	29.21	27.94	3.8
26	37.72	31.75	30.48	3.8
30	42.80	36.83	35.56	3.8
34	47.88	41.91	40.64	3.8
40	55.50	49.53	48.26	3.8
50	68.20	62.23	60.96	3.8

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

03639

APPROVED BY MEI

CHECKED BY HZF


DRAWING BY CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ X. ±0.30
.X ±0.20
.XX ±0.10
.XXX ±0.05

SCALE NONE

REV. B2

UNIT mm



2	B2	Modify Data	HZF	09/10/2015
1	B1	Modify Data	HZF	05/28/2008
0	B0	NEW RELEASE	BECKY	04/04/2006
NO.REV.	REVISIONS		CHK	DATE