

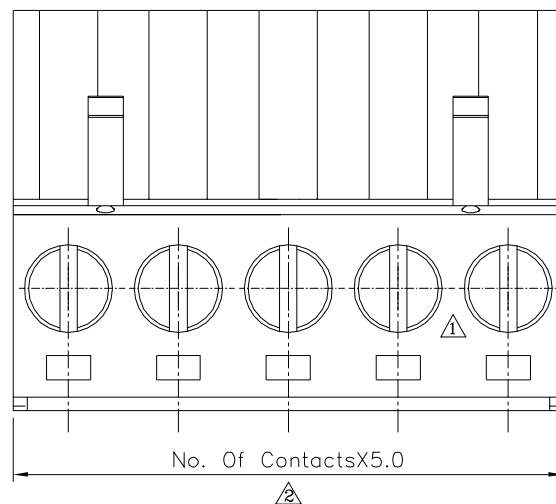


△△△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:20A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Operation Temperature:-40°C~+105°C
Torque:5.0 Kgf.cm/M3
Wire Range:12~26 AWG
Contacts(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator:Polyamide(UL94V-0),Green
RoHS Compliant

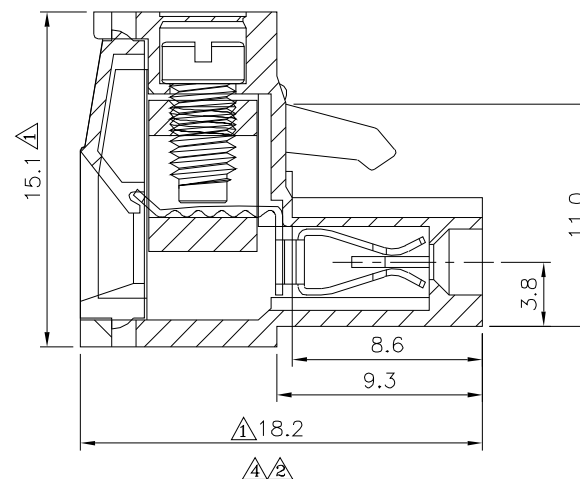

Note	
Length	Tolerance
30mm	±0.30
30~60mm	±0.40
60~120mm	±0.50
120~220mm	±0.60

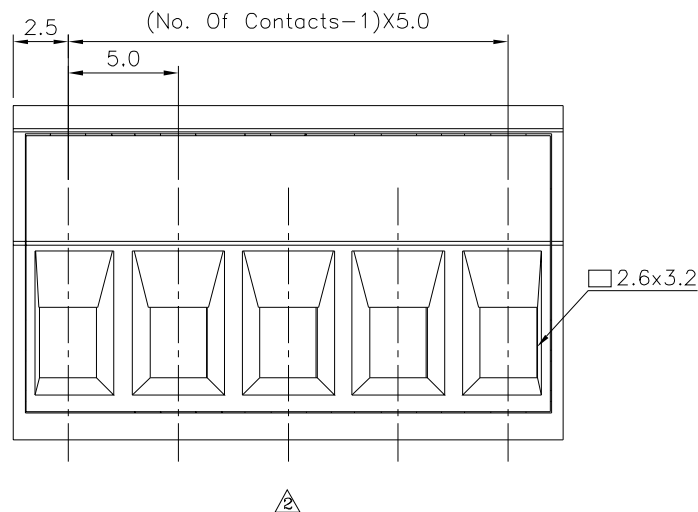

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△△

05296

SCALE


NONE

REV.

A4

APPROVED BY
Jason WuCHECKED BY
Leo HanDRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE △
X. ±0.50
.X ±0.40
.XX ±0.30
ANG. ±1°

UNIT
mm

△ A4

Modify Data

HZF

07/30/2026

△ A3

Modify Data

HZF

06/12/2015

△ A2

Modify Data

HZF

03/05/2015

△ A1

Modify Data

HZF

07/13/2010

△ A0

NEW RELEASE

HZF

05/13/2009

NO. REV.

REVISIONS

CHK

DATE