

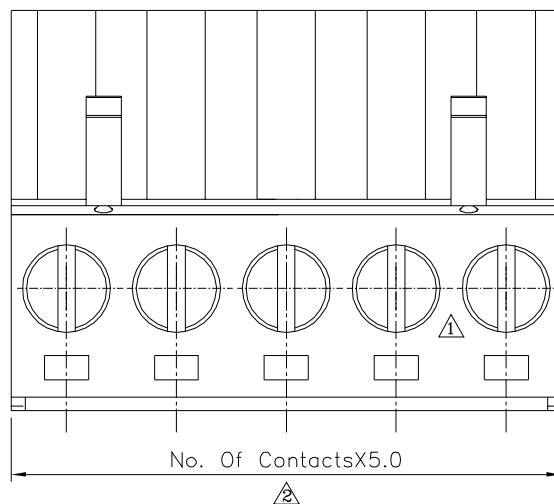


△△△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:20A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Operation Temperature:-40°C~+105°C
Torque:5.0 Kgf.cm/M3
Wire Range:12~26 AWG
Contacts(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator:Polyamide(UL94V-0),Green
RoHS Compliant

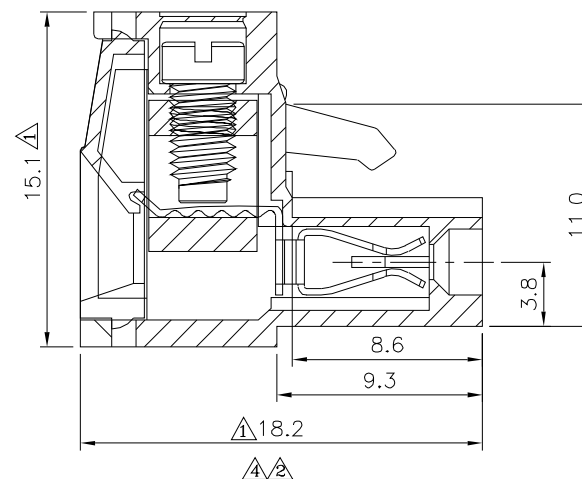

Note	
Length	Tolerance
30mm	±0.30
30~60mm	±0.40
60~120mm	±0.50
120~220mm	±0.60

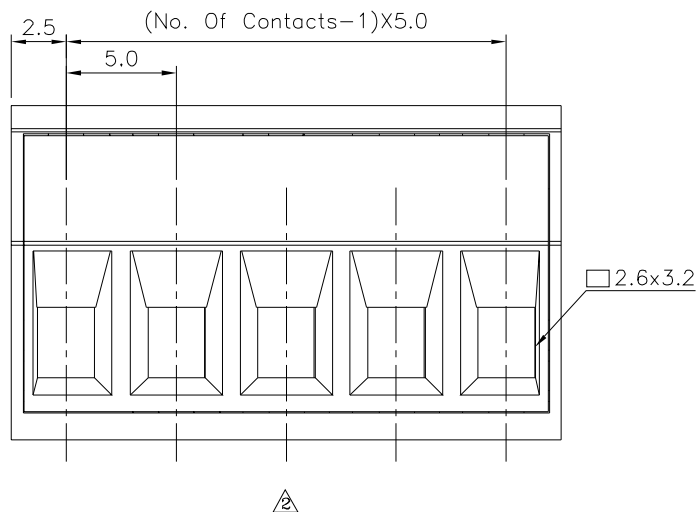

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△△

05308

SCALE

NONE

REV.

A4


APPROVED BY
Jason Wu

CHECKED BY
Leo Han

DRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE △
X. ±0.50
.X ±0.40
.XX ±0.30
ANG. ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	07/30/2026
△	A3	Modify Data	HZF	06/12/2015
△	A2	Modify Data	HZF	03/05/2015
△	A1	Modify Data	HZF	07/13/2010
△	A0	NEW RELEASE	HZF	05/13/2009