
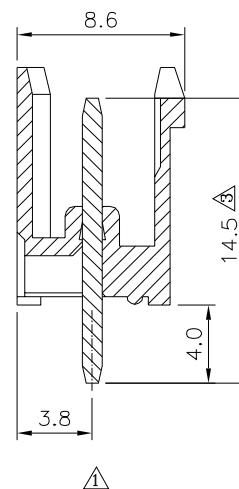
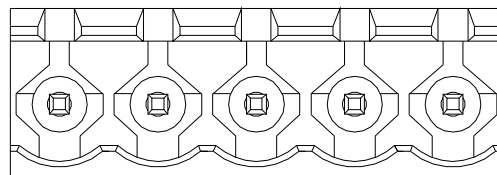


Recommended P.C.B. Layout

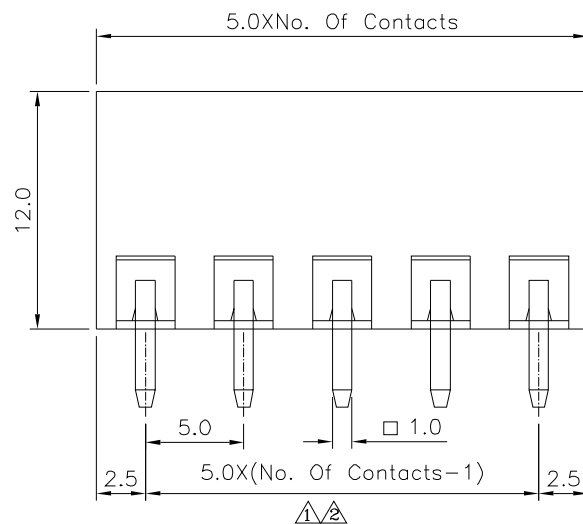

SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13

05320

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

HAO

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

$\triangle 2$	X.	± 0.50
	.X	± 0.30
	.XX	± 0.20
	ANG.	$\pm 1^\circ$

	UNIT
	mm



3	A3
---	----

3	Modify Data
---	-------------

HZF

10/30/2023

2	A2

2	Modify Data
---	-------------

H7F

10/24/2015

$\triangle \sim$	$\triangle \sim$
$\triangle 1$	$\triangle 1$

Modify: Data	
--------------	--

475

08/08/2012	
------------	--

	A
	A

Modify Data
NEW RELEASE

135

08/08/2012	
08/10/2012	

0	AC
1	REF

	NEW RELEASE
	REMO

HZF

08/12/2009	
DATE	