
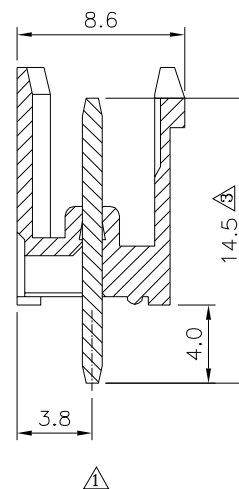
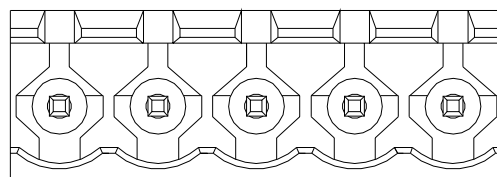


Recommended P.C.B. Layout

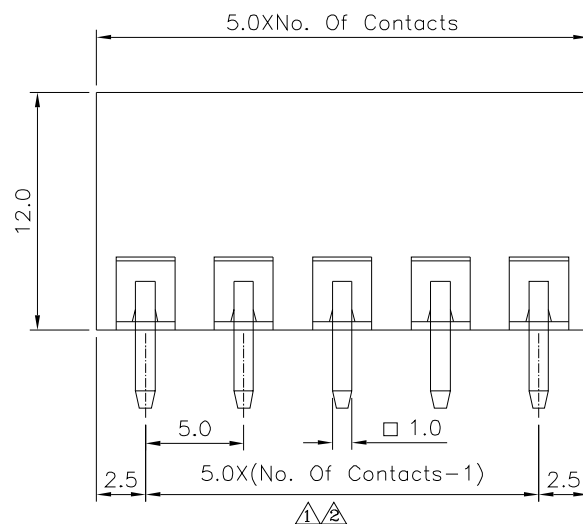

$\triangle_3 \triangle_1$ SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13

05326

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

TOLERANCES ARE

$\triangle 2$	X. ± 0.50
	.X ± 0.30
	.XX ± 0.20
	ANG. $\pm 1^\circ$

	UNIT
	mm



Δ	A

3	Modify Data
---	-------------

1175

	10/30/2023

Δ	
Δ	Δ

2	Modify Data
---	-------------

H7F

10/24/2015

1	A1
---	----

1	Modify Data
---	-------------

HZF

08/08/2012

	△ 0	AO
--	--------	----

RELEASE

HZF

08/12/2009
