



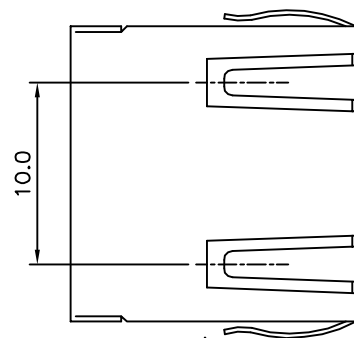


△

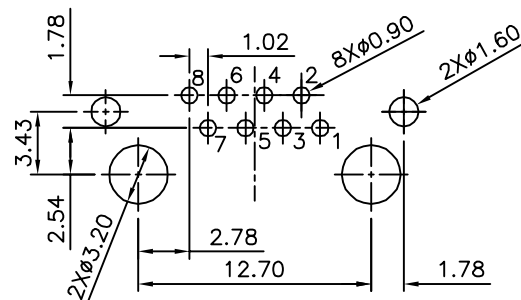


△ Recommended P.C.B. Layout

△△ SPECIFICATION


Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature: -40°C~+85°C
 Relative Humidity: 70% ±10%RH
 Insulation Resistance:500 Megaohms Min. Initial
 At 500V DC
 Contact Resistance:20 Milliohms Max. Initial
 30 Milliohms Max. Final
 Durability:750 Cycles
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz,1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz,1 Minute Between
 Shield And Contacts
 Insulator:PA46(UL94V-0),Black
 Contact:Phosphor Bronze
 Gold Plated 6u" On Contact Area
 Gold Flash On Other Area,Over Nickel
 Shield:Brass,Nickel Plated
 Cavity Conforms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

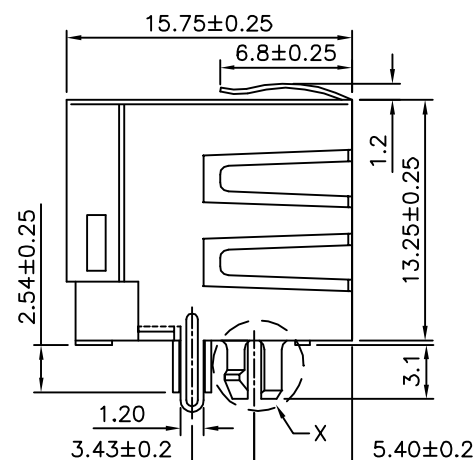


△

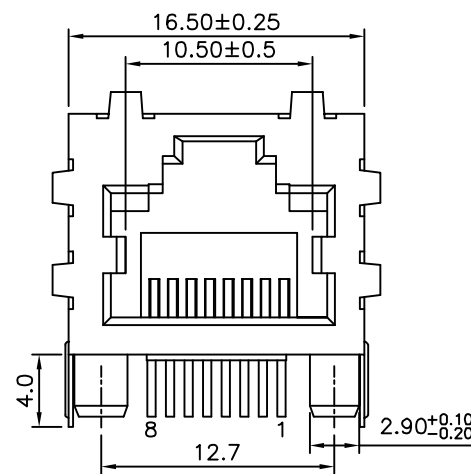

△



△



△ Detail X

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05630

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05
 ANG. ±0.5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	04/20/2016
△	A1	Modify Data	HZF	06/21/2013
△	A0	NEW RELEASE	HZF	11/02/2012