

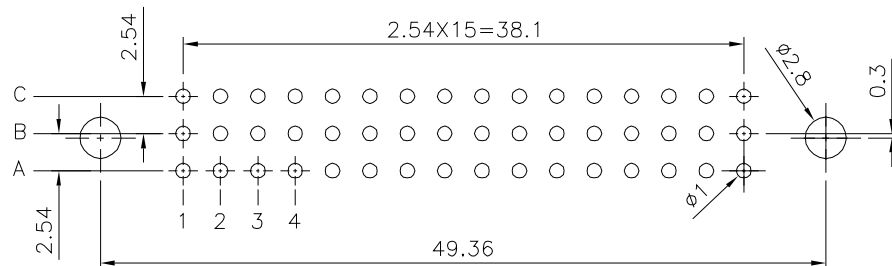
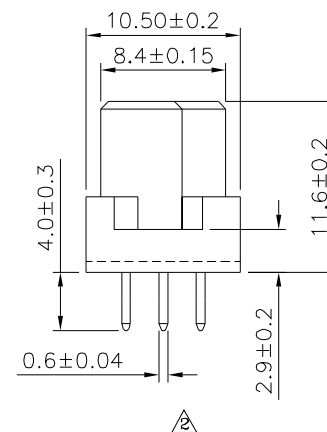


△△ SPECIFICATION

Current Rating:2 Amp
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Insulation Resistance:1000 Megaohms Min. At DC 500V
 Operation Temperature:-55°C~+105°C
 Insulator&Cap:PBT+30%G.F.(UL94V-0),Gray
 Contact:C2680-H,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

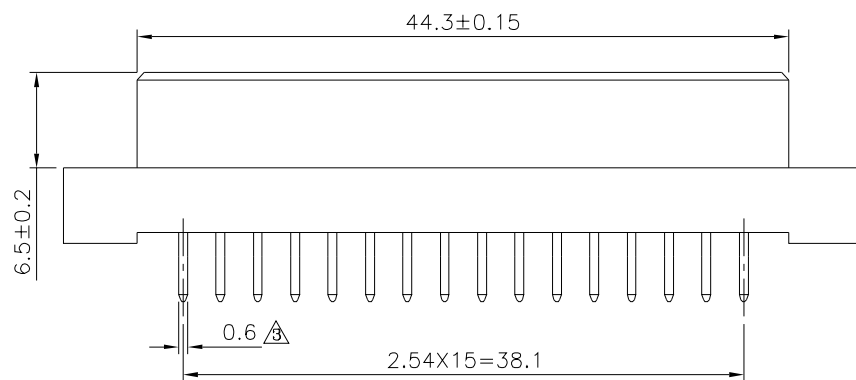

Recommended P.C.B. Layout

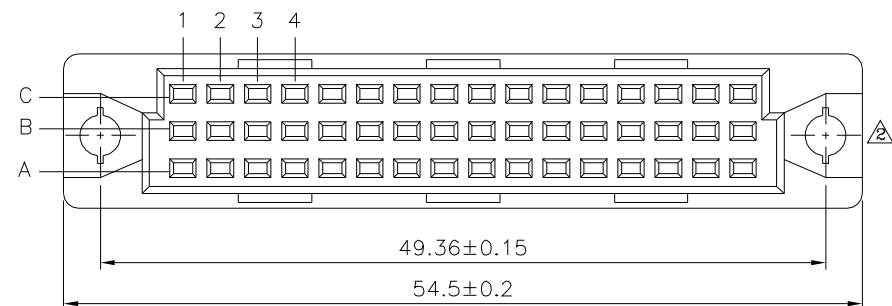

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△

05642

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△.X ±0.15 X.* ±3*
 .XX ±0.10 .X.* ±2*
 .XXX ±0.05 .XX* ±1*

UNIT mm

△ A4	Modify Data	HZF	03/29/2016
△ A3	Modify Data	HZF	01/16/2016
△ A2	Modify Data	HZF	07/15/2011
△ A1	Modify Data	BECKY	08/03/2006
△ A0	NEW RELEASE	BECKY	07/20/2004
NO. REV.	REVISIONS	CHK	DATE