File No.	555QF27806	SHEET	1/1

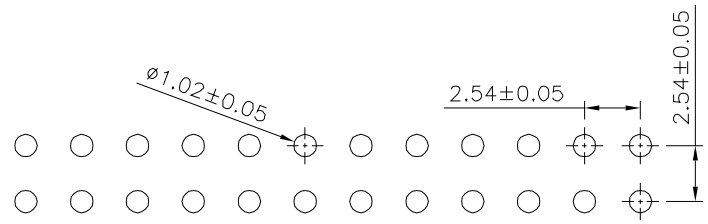

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3A
△2 Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant
△2 *2X01~2X30P Available

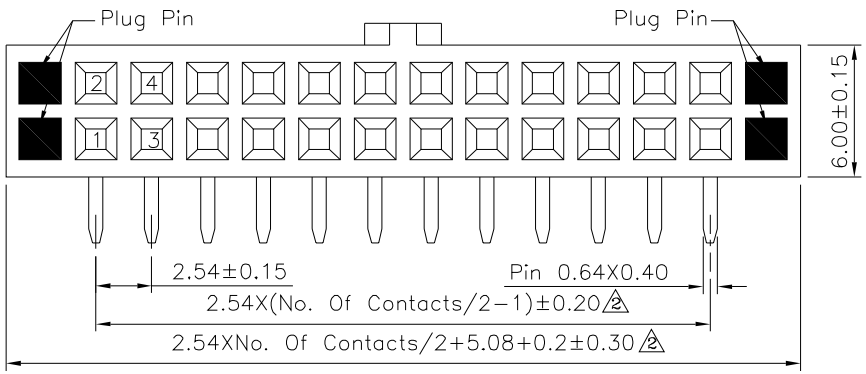

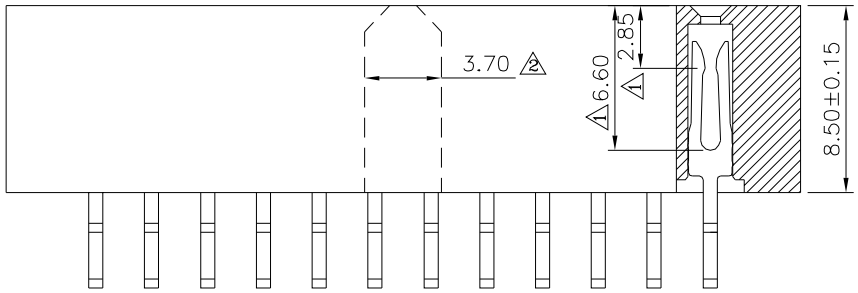

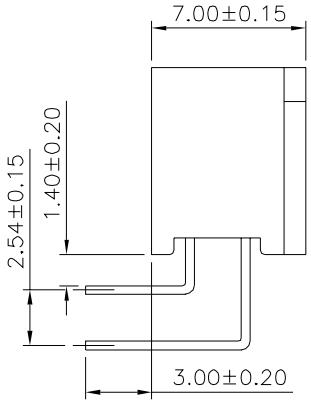

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	Jason Wu	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
06781		CHECKED BY	Leo Han	.X ±0.30	
		DRAWING BY	Michelle Lee	.XX ±0.20	
SCALE	NONE	REV.	A2	ANG.	
				UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	06/27/2026
△1	A1	Modify Data	HZF	10/30/2020
△0	A0	NEW RELEASE	HZF	02/01/2015