


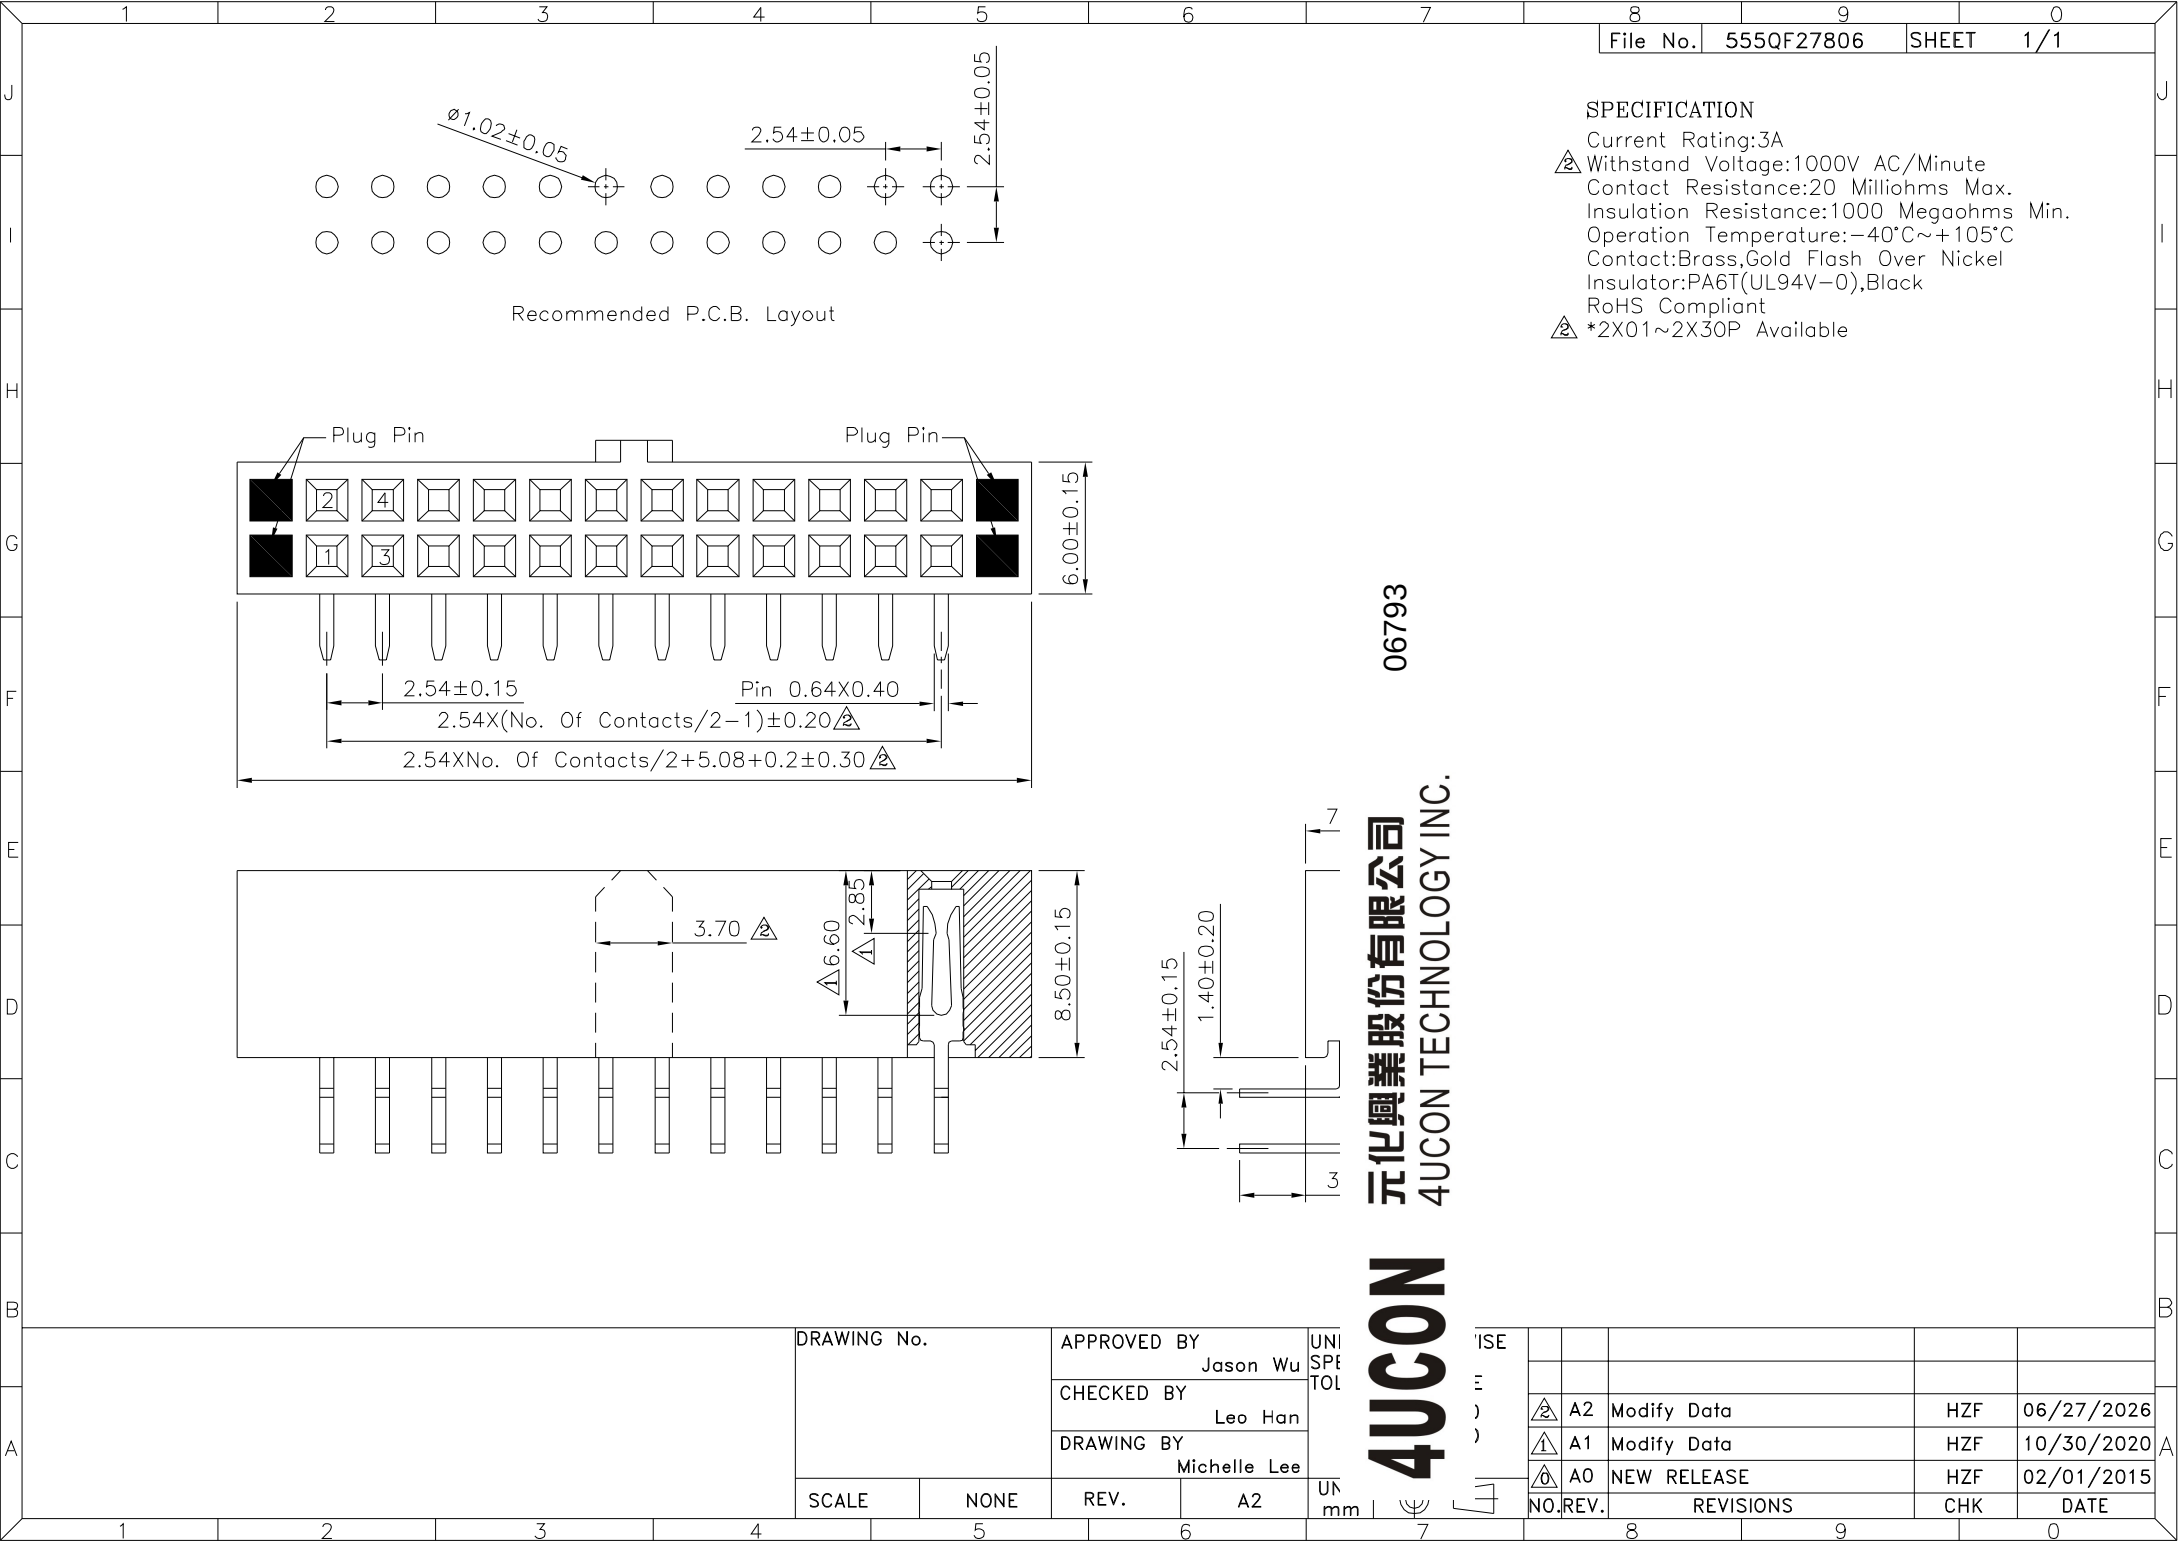

SPECIFICATION
Current Rating:3A
⚠ Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant
⚠ *2X01~2X30P Available

06793

元化興業股份有限公司
4U CON TECHNOLOGY INC.

4U CON

DRAWING No.		APPROVED BY		UNI SPE TOL
		Jason Wu		
		CHECKED BY		
Leo Han				
DRAWING BY				
Michelle Lee				
SCALE	NONE	REV.	A2	UN mm

ISE E) 4					
	⚠ A2	Modify Data	HZF	06/27/2026	
	⚠ A1	Modify Data	HZF	10/30/2020	A
	⚠ A0	NEW RELEASE	HZF	02/01/2015	
NO. REV.		REVISIONS		CHK	DATE