
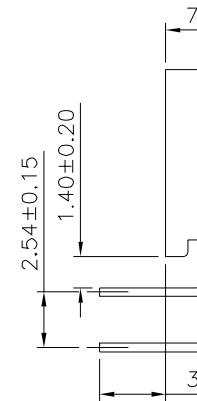


SPECIFICATION

Current Rating:3A
 ⚠ Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant
 ⚠ *2X01~2X30P Available

Recommended P.C.B. Layout

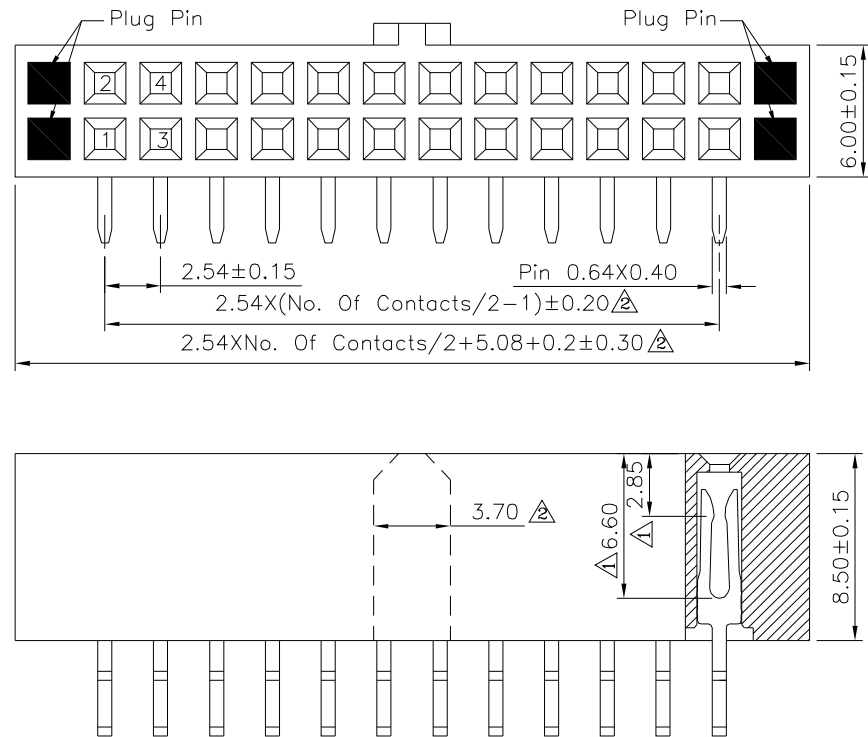

06795

元化興業股份有限公司
4UCON TECHNOLOGY INC.

4U CON

DRAWING No.		APPROVED BY		UN SP TO
		Jason Wu		
		CHECKED BY		
		Leo Han		
		DRAWING BY		
		Michelle Lee		
SCALE	NONE	REV.	A2	UN

ISE					
E					
)					
)					
		A2	Modify Data	HZF	06/27/2026
		A1	Modify Data	HZF	10/30/2020
		A0	NEW RELEASE	HZF	02/01/2015
	NO. REV.	REVISIONS		CHK	DATE