

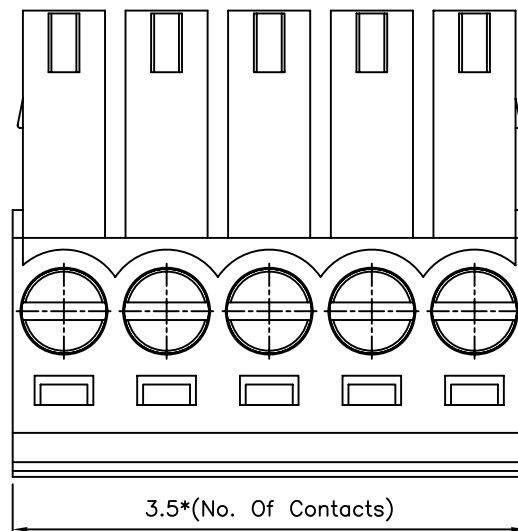


△ SPECIFICATIONS

Voltage Rating: 250VAC
 Current Rating: 8 Amps/Way Max
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 5000 Megohms/1000V
 Withstanding Voltage: 1500VAC For 1 Minute
 Wire Range: 16-26Awg
 Torque: 2.2Kgf.CM/M2
 Operating Temperature: -40° C To +105° C
 Contact(Metal Housing): Brass(CuZn)
 Terminal Screw: Steel Galvanized And Chromatized Or White Zinc
 Wire Guard: PhBz
 Insulator Body(Housing): Glass-Filled Thermoplastic UL94V-0 Rated

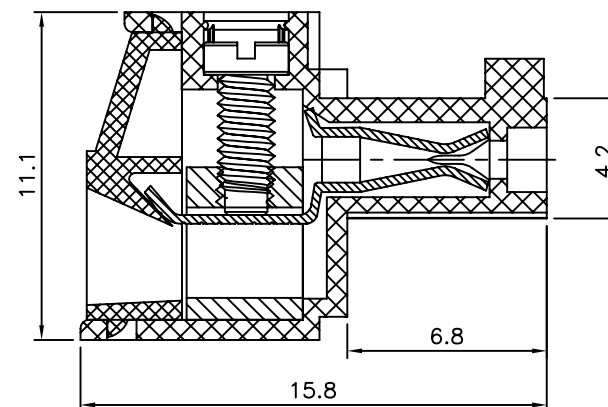

2p To 6p With Wedge,
 Above 7p Without
 Wedge(Including 7p)

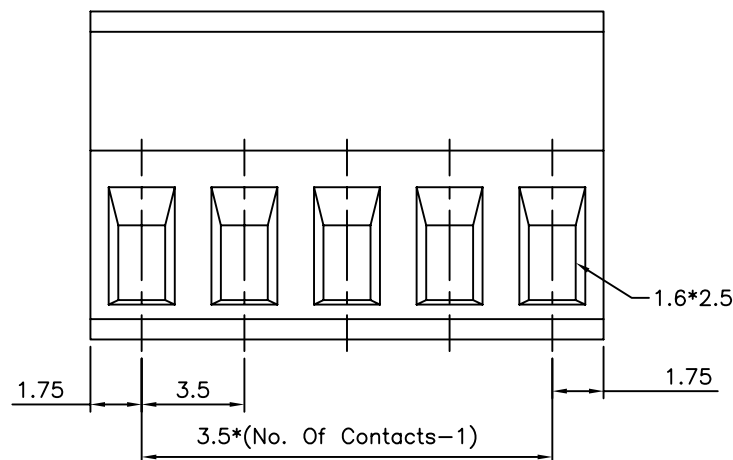

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07545

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG ±1°

SCALE

NONE

REV.

A1

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A1	Add Wedge Option & Modify Spec.	HZF	07/05/2007
△ A0	NEW RELEASE	HZF	05/15/2006