


File No.	689QF15802	SHEET	1/1

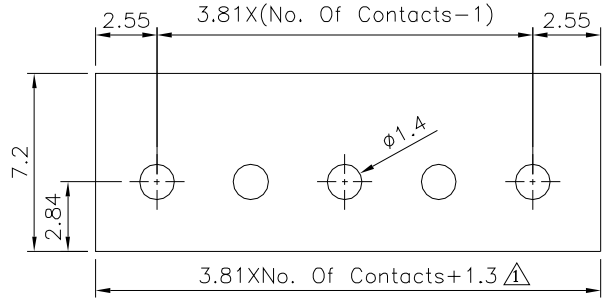


3 Recommended P.C.B. Layout

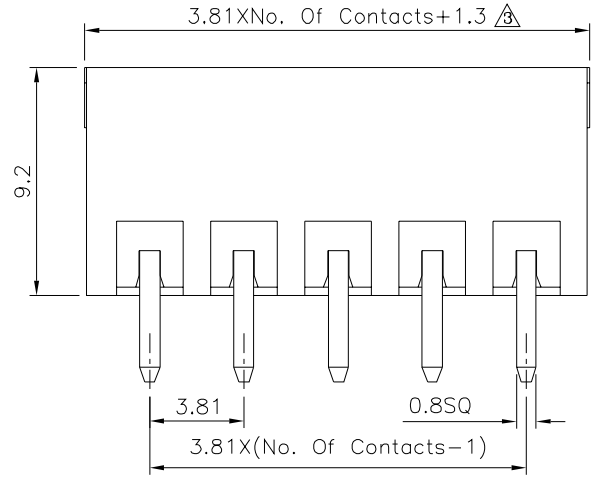

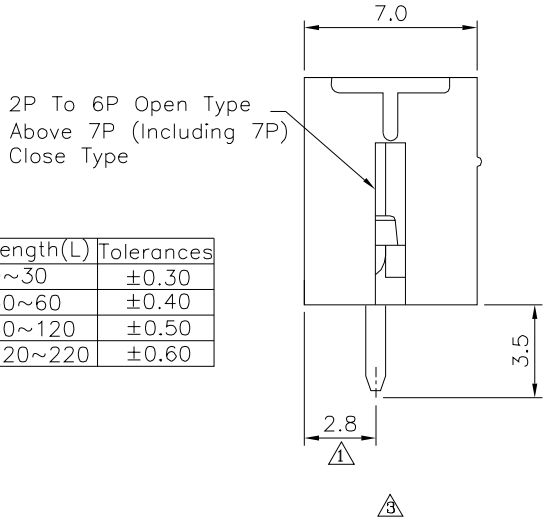

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

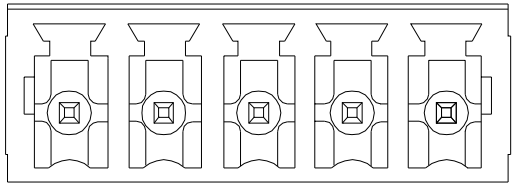

3 1 SPECIFICATION

Current Rating:12A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:1600V AC/Minute
Operation Temperature:−40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V−0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1 2	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 3
07550	Jason Wu	X. ±0.50
	CHECKED BY Leo Han	.X ±0.40
	DRAWING BY Michelle Lee	.XX ±0.30
SCALE NONE	REV. A3	ANG. ±1°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Mata	HZF	06/15/2026
2	A2	Modify Mata	HZF	01/30/2016
1	A1	Modify Mata	HZF	08/14/2012
0	A0	NEW RELEASE	HZF	04/10/2009