
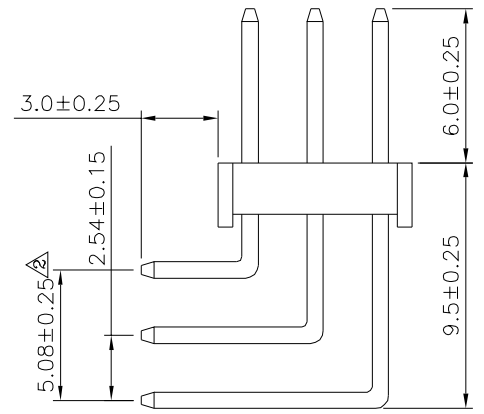
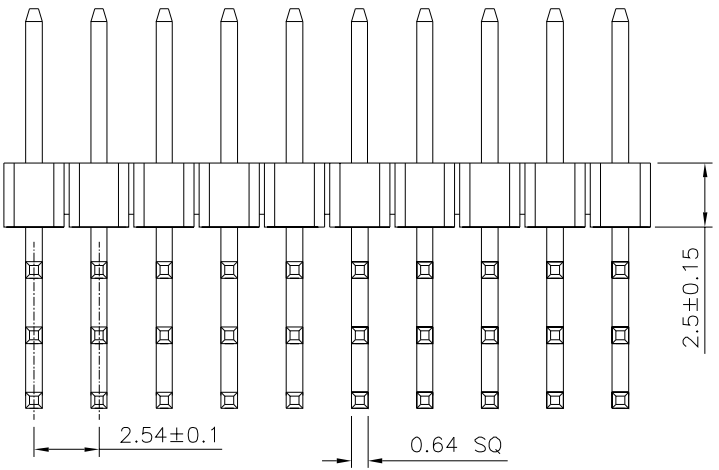


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

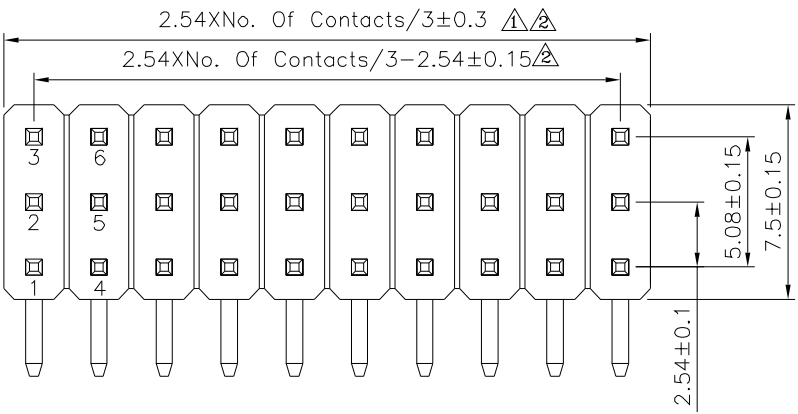

**SPECIFICATION**  
 Current Rating:3A  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PA9T(UL94V-0),Black  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*	
07596		MEI			
		CHECKED BY	HZF		
SCALE		REV.	A3	UNIT	mm
NONE					

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	10/20/2023
2	A2	Modify Data	HZF	01/12/2022
1	A1	Modify Data	HZF	02/08/2017
0	A0	NEW RELEASE	HZF	08/09/2014